Xiamen Goomax Energy Technology Co.,Ltd.

Office: 17/F, Building 1, Electronics City International Innovation Center, Jimei District, Xiamen, China

Factory Add:Goomax Industrial Park, Dongtian Town, Nan’ an City, Fujian, China

Tel:+86-592-2938661 Fax:+86-592-2938662 Email:info@goomaxsolar.com

Web:www.goomaxsolar.com

Domestic Goomax

Goomax Metal Co.，Ltd.

Fujian Goomax Energy Technology Co., Ltd.

Handan Goomax Energy Technology Co., Ltd.

Beijing Huashi New Energy Development Co.，Ltd.

0verseas Goomax

Japan Goomax
Add:West of New Bridge,Minato-ku,Tokyo,Japan

Australia Goomax
Add:5/115 Woodpark Road,smithfield N.W 2164

Philippine Goomax
Add: Binondo District, Manila City, Philippine

Korea Goomax
Add:No.1706,48,Achasan-ro17-gil,Seongdong-gu, Seoul, Republic of Korea

Europe Goomax
Add:Passeig de Guayaquil,17,Barcelona CP.08030.España



Solar Racking Component

Web WeChat

2026-07- AU

GOOMAX



Contents

Rail

R56 Rail ····01
R69 Rail ····02
R69 Black Rail ····03
R69-L Rail ····04
R69-L Black Rail ····05
R97 Rail ····06
R97-B Rail ····07

Rail Joiner

#51 150mm Earthing Rail Joiner ····08
#51-1 150mm Earthing Rail Joiner ····09
#56 150mm Earthing Rail Joiner ····10
#51 150mm Earthing Rail Joiner (Black) ····11
#56 150mm Earthing Rail Joiner (Black) ····12

Tile Roof Hook

Tile Hook ····13
Tile Hook Vertical ····14

GM-CTH-10-AZ-02

L130 mm Tile Roof Hook ····15

Adjustable Tile Hook

Adjustable Tile Hook ····16

Tilt

Tilt Rear Arm 10/15 ····17
Tilt Rear Arm 15/30 ····18
Black Tilt Rear Arm 15/30 ····19
Tilt Front Arm ····20
Black Tilt Front Arm ····21

Tin Feet

L Feet ····22
#02 L Feet ····23
Black L Feet ····24
L Feet ····25
L Feet with Aluminium Waterproof Plate ····26
Adaptor for Corrugated Roof ····27
Tile Hook Height Extender ····28
Tin Feet Extender ····29

Mid Clamp

30mm Mid Clamp ····30
35mm Mid Clamp ····31
40mm Mid Clamp ····32
45mm Mid Clamp ····33
50mm Mid Clamp ····34

Adjustable Mid Clamp

30/35mm Mid Clamp ····35
30/35mm Mid Clamp ····36
35/40mm Mid Clamp ····37
Black 30/35mm Mid Clamp ····38
Black 30/35mm Mid Clamp with Earthing Plate ····39
35/40mm Mid Clamp ····40
30/40mm Mid Clamp ····41
35/40mm Mid Clamp ····42
35/40mm Mid Clamp with Earthing Clip ····43
35-50mm Adjustable Mid Clamp ····44
Mid Clamp 30-35mm (L50) ····45
BLACK Mid Clamp 30-35mm (L50) ····46
Mid Clamp 30-35mm (L50) ····47
BLACK Mid Clamp 30-35mm (L50) ····48

Adjustable End Clamp

28/30mm End Clamp ····49
30/32mm End Clamp ····50
30/35mm End Clamp ····51
Black 30/35mm End Clamp ····52
30/40mm End Clamp ····53
35/40mm End Clamp ····54
35-50mm Adjustable End Clamp ····55

Thin Film Mid Clamp

Thin Film Mid Clamp ····56

Thin Film End Clamp

Thin Film End Clamp ····57

End Clamp

30mm End Clamp ····58
35mm End Clamp ····59
40mm End Clamp ····60
45mm End Clamp ····61
50mm End Clamp ····62
End Clamp 30-35mm (L50) ····63
BLACK End Clamp 30-35mm (L50) ····64
28-35mm Mid/End Universal Clamp with Earthing Clip ····65
Black 28-35mm Mid/End Universal Clamp with Earthing Clip ····66

Cable Clip

Goomax Cable Clip ····67

Earthing Clip

Goomax Earthing Washer ····68
#12 Goomax Earthing Washer ····69
#04 Goomax Earthing Washer ····70

Grounding Lug

Goomax Grounding Lug ····71
Black Grounding Lug ····72

Roof Clamps

Goomax Kliplok 406 Interface ····73
Goomax Kliplok 700 Interface ····74
Goomax Kliplok 700 Interface with L feet ····75
Goomax Kliplok 305 Interface ····76
Goomax Universal Kliplok 406&700 Interface -Small ····77
Goomax Universal Kliplok 406&700 Interface -Big ····78
Goomax Trapezoidal Roof Clamp ····79

Commercial Mounting System

Arc Rail ····80
Arc Rail joiner ····81
28/35 Arc Universal Panel Clamp ····82
Arc Base ····83
T Module ····84
Commercial Tilt Front Leg 10 degrees ····85
Black Commercial Tilt Front Leg 10 degrees ····86
Commercial Tilt Rear Leg 10 degrees ····87
Black Commercial Tilt Rear Leg 10 degrees ····88
Commercial Tilt Front Leg 15 degrees ····89
Commercial Tilt Rear Leg 15 degrees ····90


GM-C69

All-black Rail End Cap ····91

Rail

Product Name	Rail
Product Code	GM-R56
Dimensions	W 28xH 55mm
Weight	0.73kg/m
Material	AL6005-T5
Surface Finish	Anodized (10um)
Packaging	4pcs/pack, 432pcs/pallet
Standard	AS/NZS 1170.2



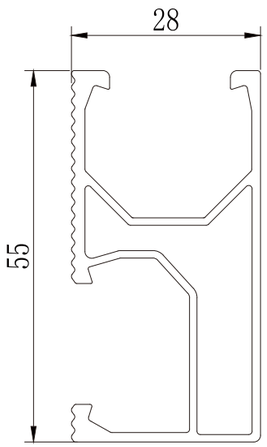


GOOMAX

Rail

Product Name	Rail
Product Code	GM-R69
Dimensions	W 28xH 52mm
Weight	0.68kg/m
Material	AL6005-T5
Surface Finish	Anodized (10um)
Packaging	4pcs/pack, 648pcs/pallet
Standard	AS/NZS 1170.2




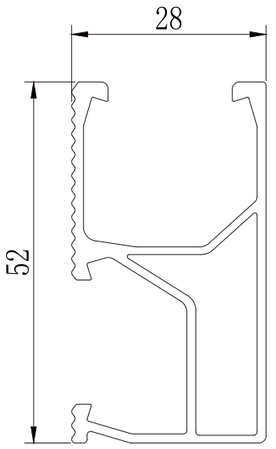

Rail

Product Name	Rail
Product Code	GM-R69-B
Dimensions	W 28xH 52mm
Weight	0.68kg/m
Material	AL6005-T5
Surface Finish	Black Anodized (10um)
Packaging	4pcs/pack, 648pcs/pallet
Standard	AS/NZS 1170.2




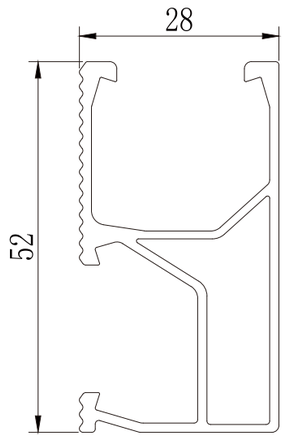

Rail

Product Name	Rail
Product Code	GM-R69-L
Dimensions	W 28xH 52mm
Weight	0.638kg/m
Material	AL6005-T5
Surface Finish	Anodized (10um)
Packaging	4pcs/pack, 648pcs/pallet
Standard	AS/NZS 1170.2




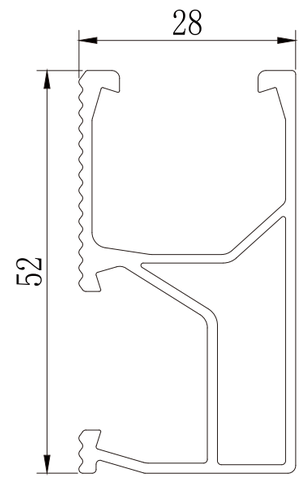

Rail

Product Name	Rail
Product Code	GM-R69-L-B
Dimensions	W 28xH 52mm
Weight	0.638kg/m
Material	AL6005-T5
Surface Finish	Black Anodized (10um)
Packaging	4pcs/pack, 648pcs/pallet
Standard	AS/NZS 1170.2




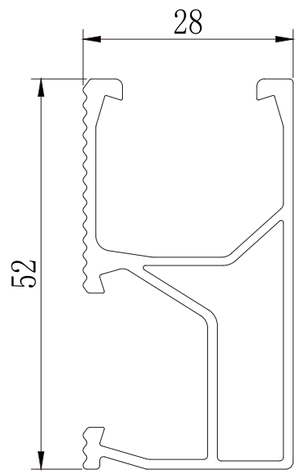

Rail

Product Name	Rail
Product Code	GM-R97
Dimensions	W 28xH 48mm
Weight	0.554kg/m
Material	AL6005-T5
Surface Finish	Anodized (10um)
Packaging	4pcs/pack, 648pcs/pallet
Standard	AS/NZS 1170.2




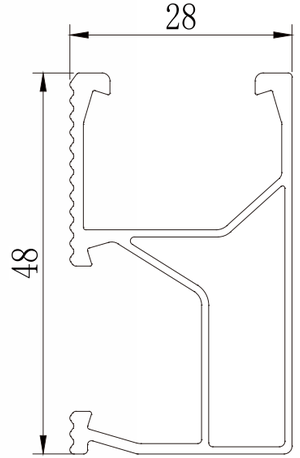

Rail

Product Name	Rail
Product Code	GM-R97-B
Dimensions	W 28xH 48mm
Weight	0.554kg/m
Material	AL6005-T5
Surface Finish	Anodized (10um)
Packaging	4pcs/pack, 648pcs/pallet
Standard	AS/NZS 1170.2




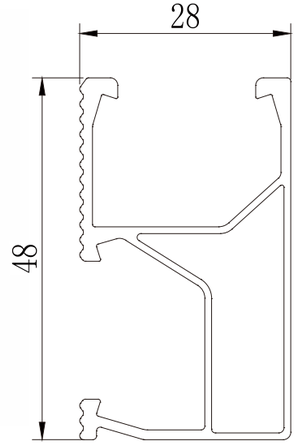

Rail Joiner

Product Name	150mm Earthing Rail Joiner
Product Code	GM-RS-51-AZ
Application	Connect Goomax rails for longer PV array and pierce rails' surfaces for earthing
Dimensions	L 150xW 30xH 8.8mm
Weight	0.134kg
Material	AL6005-T5
Surface Finish	Anodized
Packaging	160pcs/carton, 500x300x210mm
Standard	AS/NZS 1170.2



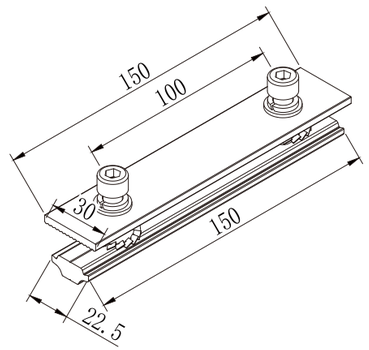


Component List (Qty./Set)			
Joiner	1	T Nut	1
SUS304 Washer Set	2	Hexagon Bolt Set (M8*25)	2
SUS304 Star Washer	2		

Rail Joiner

Product Name	150mm Earthing Rail Joiner
Product Code	GM-RS-51-AZ-1
Application	Connect Goomax rails for longer PV array and pierce rails' surfaces for earthing
Dimensions	L 150xW 28xH 8.8mm
Weight	0.12kg
Material	AL6005-T5
Surface Finish	Anodized (10um)
Packaging	160pcs/carton, 500x300x210mm
Standard	AS/NZS 1170.2



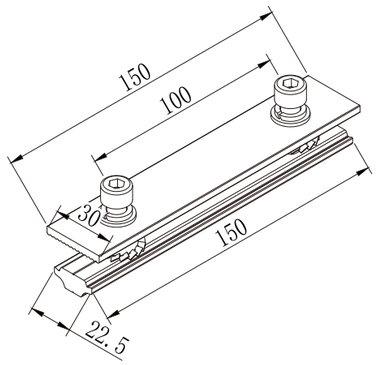


Component List (Qty./Set)			
Joiner	1	T Nut	1
SUS304 Washer Set	2	Hexagon Bolt Set (M8*25)	2
SUS304 Star Washer	2		

Rail Joiner

Product Name	150mm Earthing Rail Joiner
Product Code	GM-RS-56-AZ
Application	Connect Goomax rails for longer PV array and pierce rails' surfaces for earthing
Dimensions	L 150xW 28xH 6.5mm
Weight	0.112kg
Material	AL6005-T5
Surface Finish	Anodized (10um)
Packaging	160pcs/carton, 500x300x210mm
Standard	AS/NZS 1170.2



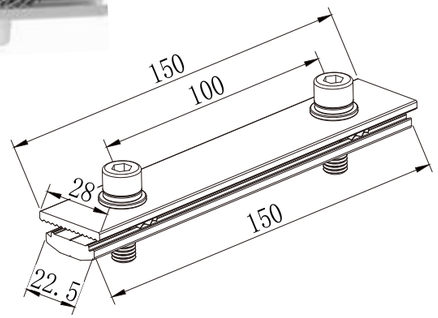


Component List (Qty./Set)			
Joiner	1	T Nut	1
SUS304 Washer Set	2	Hexagon Bolt Set (M8*25)	2
SUS304 Star Washer	2		

Rail Joiner

Product Name	Black 150mm Earthing Rail Joiner
Product Code	GM-RS-51-AZ-B
Application	Connect Goomax rails for longer PV array and pierce rails' surfaces for earthing
Dimensions	L 150xW 30xH 8.8mm
Weight	0.134kg
Material	AL6005-T5
Surface Finish	Black Anodized
Packaging	160pcs/carton, 500x300x210mm
Standard	AS/NZS 1170.2



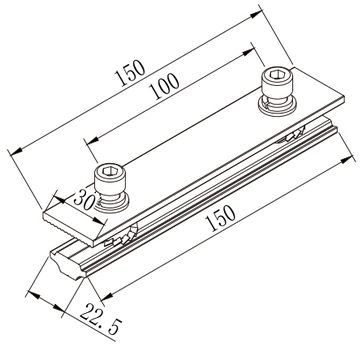


Component List (Qty./Set)			
Joiner	1	T Nut	1
SUS304 Washer Set	2	Hexagon Bolt Set (M8*25)	2
SUS304 Star Washer	2		

GOOMAX

Rail Joiner

Product Name	150mm Earthing Rail Joiner (Black)
Product Code	GM-RS-56-AZ-B
Application	Connect Goomax rails for longer PV array and pierce rails' surfaces for earthing
Dimensions	L 150xW 28xH 6.5mm
Weight	0.112kg
Material	AL6005-T5
Surface Finish	Black Anodized
Packaging	160pcs/carton, 500x300x210mm
Standard	AS/NZS 1170.2



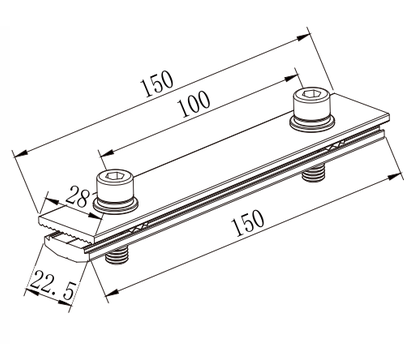


Component List (Qty./Set)			
Joiner	1	T Nut	1
SUS304 Washer Set	2	Hexagon Bolt Set (M8*25)	2
SUS304 Star Washer	2		

Tile Roof Hook

Product Name	Tile Hook
Product Code	GM-CTH-01-AZ-02
Application	Tile Roof with Timber Purlin
Dimensions	L 155xW 180xH 166mm
Weight	0.566kg/set
Material	Stainless Steel (SUS304), Screw: SUS410
Surface Finish	Sandblast, class3 for screws
Packaging	24pcs/carton, 500x300x210mm
Standard	AS/NZS 1170.2



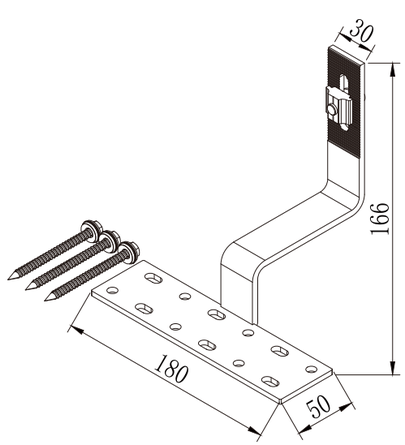


Component List（Qty./Set）			
Tile Hook #1	1	T Nut	1
SUS410 Wood Screw (M6.3*65)	3	Hexagon Bolt Set (M8*25)	1
SUS304 M8 Washer Set	1		

Tile Roof Hook

Product Name	Tile Hook Vertical
Product Code	GM-CTH-03-AZ
Application	Tile roof with Timber Purlin
Dimensions	L 155xW 180xH 166mm
Weight	0.566kg/set
Material	Stainless Steel (SUS304), Screw: SUS410
Surface Finish	Sandblast, class3 for screws
Packaging	24pcs/carton, 500x300x210mm
Standard	AS/NZS 1170.2



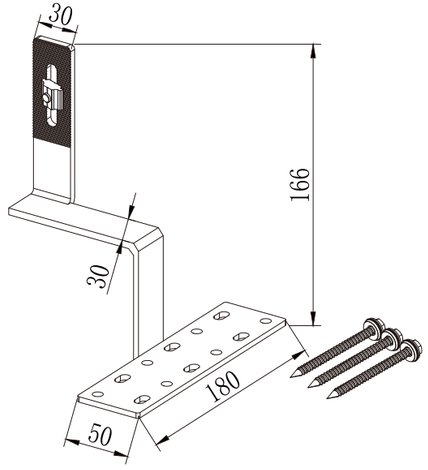


Component List（Qty./Set）			
Tile Hook #3	1	T Nut	1
SUS410 Wood Screw (M6.3*65)	3	Hexagon Bolt Set (M8*25)	1
SUS304 M8 Washer Set	1		

Adjustable Tile Hook

Product Name	L130 mm Tile Roof Hook
Product Code	GM-CTH-10-AZ-02
Application	Tile Roof with Timber Purlin
Dimensions	L 180xW 180xH 160mm
Weight	0.769kg
Material	Stainless Steel (SUS304), Screw: SUS410
Surface Finish	Sandblast, class3 for screws
Packaging	24pcs./carton , 500x300x210mm
Standard	AS/NZS 1170.2



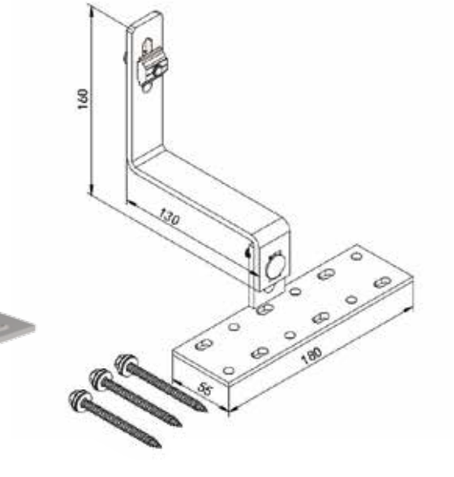


Component List（Qty./Set）			
Adjustable Tile Hook	1	T Nut	1
SUS410 Wood Screw (M6.3*65)	3	Hexagon Bolt Set (M8*20)	1
SUS304 M8 Washer Set	1	Hexagon Bolt Set (M10*25)	1

GOOMAX

Adjustable Tile Hook

Product Name	Adjustable Tile Hook
Product Code	GM-CTH-10-AZ
Application	Tile Roof with Timber Purlin
Dimensions	L 180xW 157xH 160mm
Weight	0.85kg
Material	Stainless Steel (SUS304), Screw: SUS410
Surface Finish	Sandblast, class3 for screws
Packaging	24pcs/carton, 500x300x210mm
Standard	AS/NZS 1170.2



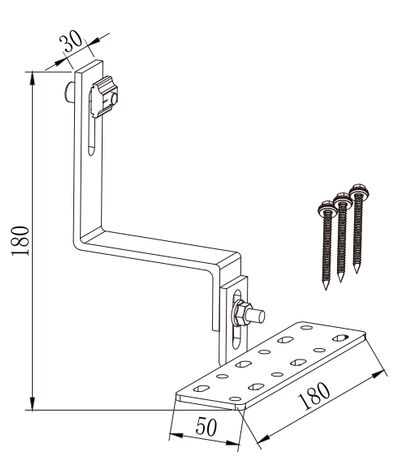


Component List（Qty./Set）			
Adjustable Tile Hook	1	T Nut	1
SUS410 Wood Screw (M6.3*65)	3	Hexagon Bolt Set (M8*20)	1
SUS304 M8 Washer Set	1	Hexagon Bolt Set (M10*25)	1

Tilt

Product Name	Tilt Rear Arm 10/15
Product Code	GM-AS-200-AZ
Application	Metal Roof, Flat Roof
Dimensions	L 120xH 200mm
Weight	576g/set
Material	AL6005-T5, Screw: SUS410
Surface Finish	Anodized (10um), class3 for screws
Packaging	20pcs/carton, 500x300x210mm
Standard	AS/NZS 1170.2



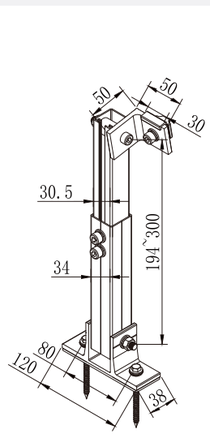


Component List（Qty./Set）			
Internal Tube	1	Hexagon Bolt Set (M8*60)	1
External Tube	1	Hexagon Bolt Set (M8*25)	1
L Feet	1	Hexagon Bolt Set (M8*50)	1
L connector	1	T Nut	1
Rubber Washer	2	Aluminum Ring	1
SUS304 M8 Washer Set	5	SUS410 Wood Screw (M6.3*80)	2
Hexagon Bolt Set (M8*20)	2		

Tilt

Product Name	Tilt Rear Arm 15/30
Product Code	GM-AS-400-AZ
Application	Metal Roof, Flat Roof
Dimensions	L 120xH 400mm
Weight	669g/set
Material	AL6005-T5, Screw: SUS410
Surface Finish	Anodized (10um), class3 for screws
Packaging	15pcs/carton, 500x300x210mm
Standard	AS/NZS 1170.2



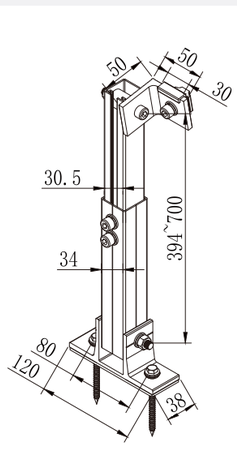


Component List（Qty./Set）			
Internal Tube	1	Hexagon Bolt Set (M8*60)	1
External Tube	1	Hexagon Bolt Set (M8*25)	1
L Feet	1	Hexagon Bolt Set (M8*50)	1
L connector	1	T Nut	1
Rubber Washer	2	Aluminum Ring	1
SUS304 M8 Washer Set	5	SUS410 Wood Screw (M6.3*80)	2
Hexagon Bolt Set (M8*20)	2		

Tilt

Product Name	Black Tilt Rear Arm 15/30
Product Code	GM-AS-400-AZ-B
Application	Metal Roof, Flat Roof
Dimensions	L 120xH 400mm
Weight	669g/set
Material	AL6005-T5, Screw: SUS410
Surface Finish	Black Anodized, class3 for screws
Packaging	15pcs/carton, 500x300x210mm
Standard	AS/NZS 1170.2



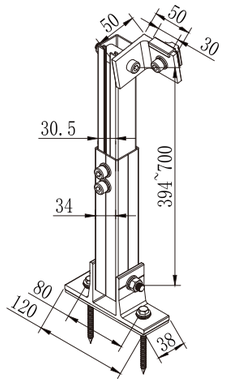


Component List（Qty./Set）			
Internal Tube	1	Hexagon Bolt Set (M8*60)	1
External Tube	1	Hexagon Bolt Set (M8*25)	1
L Feet	1	Hexagon Bolt Set (M8*50)	1
L connector	1	T Nut	1
Rubber Washer	2	Aluminum Ring	1
SUS304 M8 Washer Set	5	SUS410 Wood Screw (M6.3*80)	2
Hexagon Bolt Set (M8*20)	2		

Tilt

Product Name	Tilt Front Arm
Product Code	GM-AS-B01-AZ
Application	Metal Roof, Flat Roof
Dimensions	L 120xH 55mm
Weight	265g/set
Material	AL6005-T5, Screw: SUS410
Surface Finish	Anodized (10um), class3 for screws
Packaging	60pcs/carton, 500x300x210mm
Standard	AS/NZS 1170.2



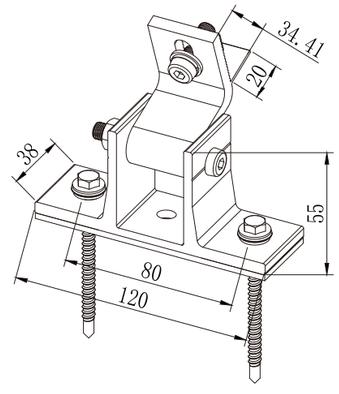


Component List（Qty./Set）			
Tilt Front Arm	1	Hexagon Bolt Set (M8*60)	1
L Feet	1	Hexagon Bolt Set (M8*25)	1
Rubber Washer	2	T Nut	1
SUS304 M8 Washer Set	2	SUS410 Wood Screw (M6.3*80)	2

Tilt

Product Name	Black Tilt Front Arm
Product Code	GM-AS-B01-AZ-B
Application	Metal Roof, Flat Roof
Dimensions	L 120xH 55mm
Weight	265g/set
Material	AL6005-T5, Screw: SUS410
Surface Finish	Black Anodized, class3 for screws
Packaging	60pcs/carton, 500x300x210mm
Standard	AS/NZS 1170.2



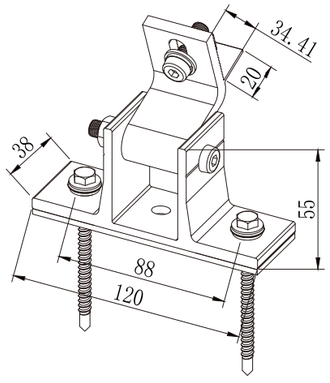


Component List（Qty./Set）			
Tilt Front Arm	1	Hexagon Bolt Set (M8*60)	1
L Feet	1	Hexagon Bolt Set (M8*25)	1
Rubber Washer	2	T Nut	1
SUS304 M8 Washer Set	2	SUS410 Wood Screw (M6.3*80)	2

Tin Feet

Product Name	L Feet
Product Code	GM-MRH-L5-AZ
Application	Metal Roof, Flat Roof
Dimensions	L 40xH 80mm
Weight	0.114kg
Material	AL6005-T5 Screw: SUS410, Rubber washer: EPDM
Surface Finish	Anodized (10um), class3 for screws
Packaging	160pcs/carton, 500x300x210mm
Standard	AS/NZS 1170.2



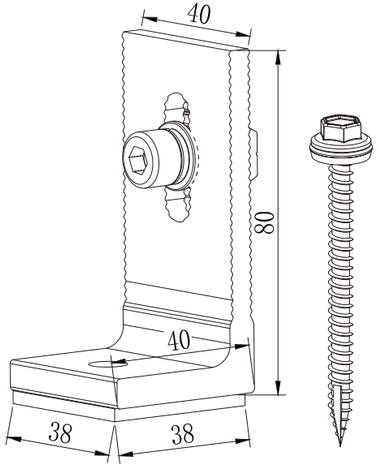


Component List（Qty./Set）			
L Feet	1	SUS410 Wood Screw M6.3*80	1
Rubber Washer	1	T Nut	1
SUS304 Washer Set	2	Hexagon Bolt Set (M8*25)	1

Tin Feet

Product Name	L Feet
Product Code	GM-MRH-L5-AZ-02
Application	Metal Roof, Flat Roof
Dimensions	L 40xH 80mm
Weight	0.11kg
Material	AL6005-T5 Screw: SUS410, Rubber washer: EPDM
Surface Finish	Anodized (10um), class3 for screws
Packaging	160pcs/carton, 500x300x210mm
Standard	AS/NZS 1170.2



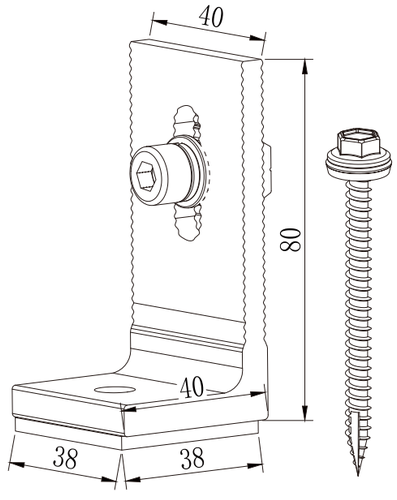


Component List（Qty./Set）			
L Feet	1	SUS410 Wood Screw M6.3*65	1
Rubber Washer	1	T Nut	1
SUS304 Washer Set	2	Hexagon Bolt Set (M8*25)	1

Tin Feet

Product Name	Black L Feet
Product Code	GM-MRH-L5-AZ-B
Application	Metal Roof, Flat Roof
Dimensions	L 40xH 80mm
Weight	0.114kg
Material	AL6005-T5 Screw: SUS410, Rubber washer: EPDM
Surface Finish	Black Anodized, class3 for screws
Packaging	160pcs/carton, 500x300x210mm
Standard	AS/NZS 1170.2



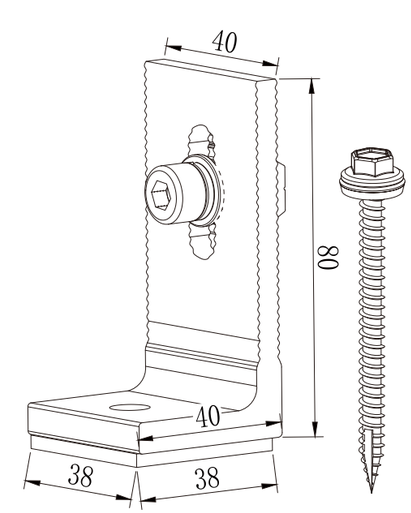


Component List（Qty./Set）			
L Feet	1	SUS410 Wood Screw M6.3*80	1
Rubber Washer	1	T Nut	1
SUS304 Washer Set	2	Hexagon Bolt Set (M8*25)	1

Tin Feet

Product Name	L Feet
Product Code	GM-MRH-L5-AZ-07-B
Application	Metal Roof, Flat Roof
Dimensions	L 40xH 80mm
Weight	0.114kg
Material	AL6005-T5
Surface Finish	Black Anodized (10 micron)
Packaging	160pcs./carton , 500x300x210mm
Standard	AS/NZS 1170.2



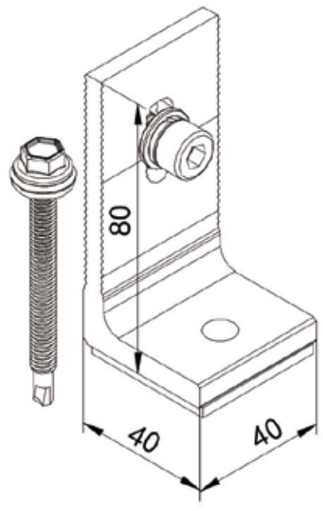


Component List（Qty./Set）			
L Feet	1	Hexagon Bolt(M8*25)	1
Rubber Washer	1	T nut	1
SUS304 Washer Set	1	1022A+Class4 Steel Screw M6.3*75	1

Tin Feet with Waterproof Plate

Product Name	L Feet with Aluminium Waterproof Plate
Product Code	GM-MRH-L5-AZ-06-B
Application	Asphalt Shingle Roof
Dimensions	L 305xW 225mm
Weight	0.401kg
Material	AL6005-T5
Surface Finish	Black Anodized (10 micron), Black Powder Coating
Packaging	80pcs./carton , 500x300x210mm
Standard	AS/NZS 1170.2




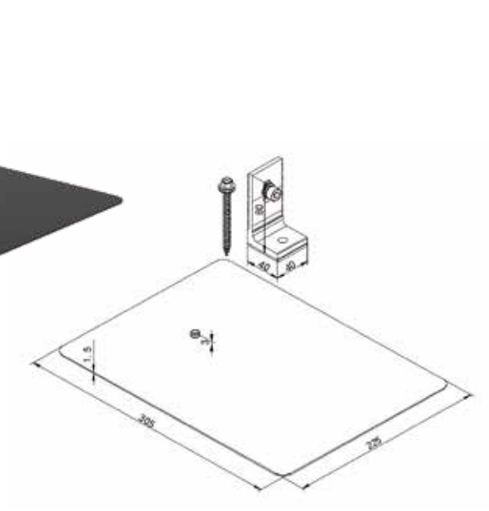

Component List（Qty./Set）			
L Feet	1	Hexagon Bolt(M8*25)	1
Rubber Washer	1	T nut	1
SUS304 Washer Set	1	SUS410+Class3 Wood Screw M6.3*80	1
Aluminum Waterproof Plate	1		

Adaptor for Corrugated Roof


Product Name	Adaptor for Corrugated Roof
Product Code	GM-MRH-43-AZ-B
Application	Corrugated Metal Roof
Dimensions	L 40xW 50xH 16.96mm
Weight	0.04kg
Material	AL6005-T5
Surface Finish	Black Anodized (10 micron)
Packaging	500pcs./carton , 500x300x210mm
Standard	AS/NZS 1170.2

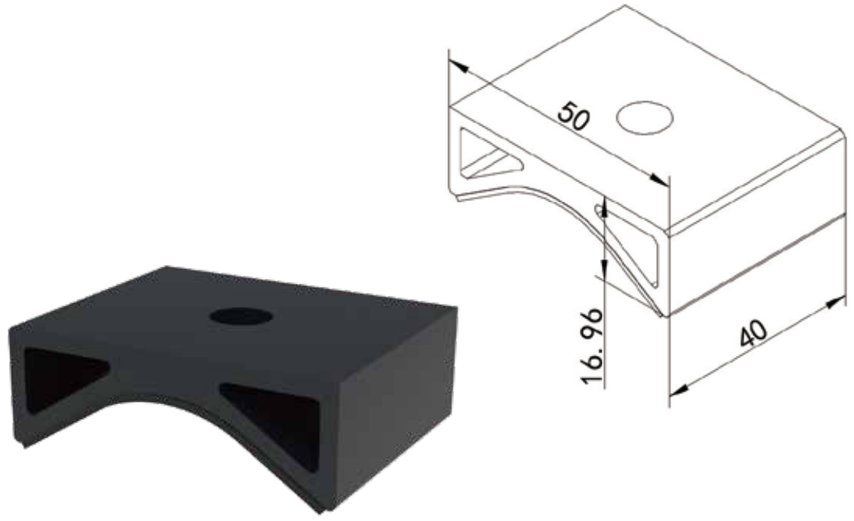

Component List（Qty./Set）			
Adaptor	1	EPDM Pad	1

Tile Hook Height Extender

Product Name	Tile Hook Height Extender
Product Code	GM-CTH-11-AZ
Application	Extend the height of standard tile hooks
Dimensions	L 145xW 30mm
Weight	0.082kg
Material	Stainless Steel (SUS304)
Surface Finish	Sandblast
Packaging	300pcs/carton, 500x300x210mm
Standard	AS/NZS 1170.2

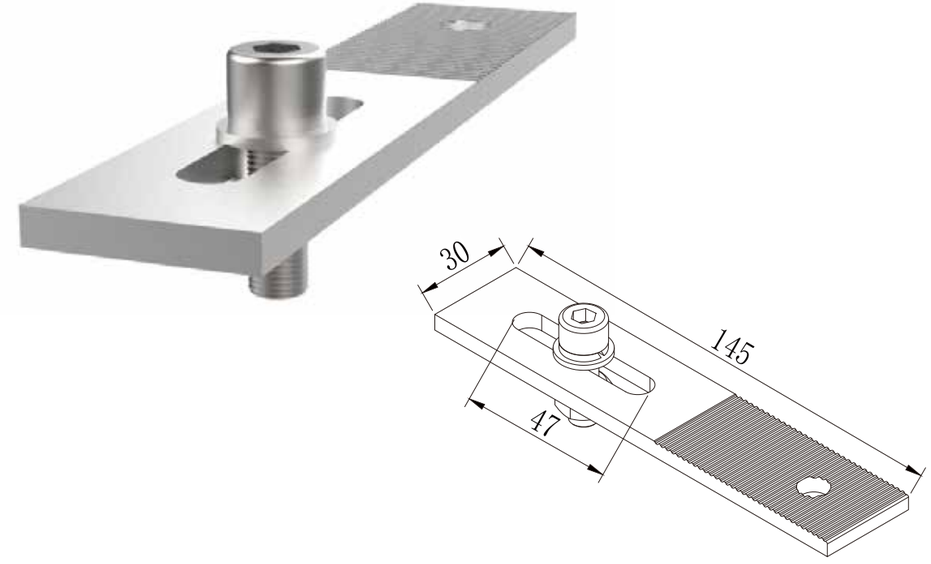


Component List（Qty./Set）			
Tile Hook Height Extender	1	Hexagon Bolt Set (M8*25)	1
SUS304 M8 Washer Set	1		

Tin Feet Extender

Product Name	Tin Feet Extender
Product Code	GM-MRH-YCJ-AZ
Application	Extend the height of standard L Feet
Dimensions	L 115.5xW 30mm
Weight	0.13kg
Material	AL6005-T5 Screw: SUS410
Surface Finish	Anodized (10um)
Packaging	300pcs/carton, 500x300x210mm
Standard	AS/NZS 1170.2



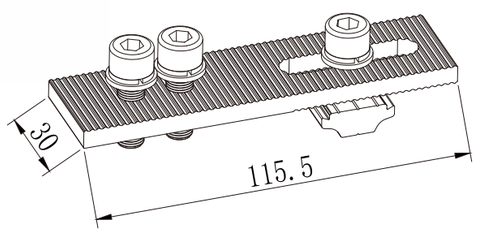


Component List（Qty./Set）			
Tin Feet Extender	1	T Nut	1
SUS304 Washer Set	2	Hexagon Bolt Set (M8*25)	1

Mid Clamp

Product Name	30mm Mid Clamp
Product Code	GM-MC-30-AZ
Application	For framed PV module of 30mm thickness (with Goomax Rails)
Dimensions	L 42xW 40xH 14.3mm
Weight	0.047kg
Material	AL6005-T5
Surface Finish	Anodized (10um)
Packaging	300pcs/carton, 500x300x210mm
Standard	AS/NZS 1170.2



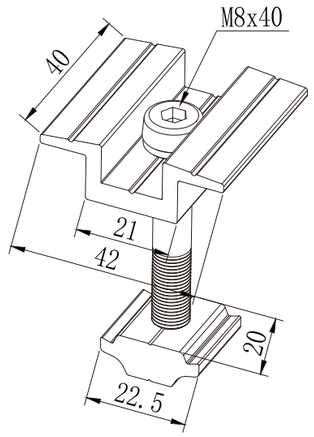


Component List（Qty./Set）			
Mid Clamp	1	T Nut	1
SUS304 Washer	1	Hexagon Bolt(M8*40)	1

Mid Clamp

Product Name	35mm Mid Clamp
Product Code	GM-MC-35-AZ
Application	For framed PV module of 35mm thickness (with Goomax Rails)
Dimensions	L 42xW 40xH 14.3mm
Weight	0.049kg
Material	AL6005-T5
Surface Finish	Anodized (10um)
Packaging	300pcs/carton, 500x300x210mm
Standard	AS/NZS 1170.2



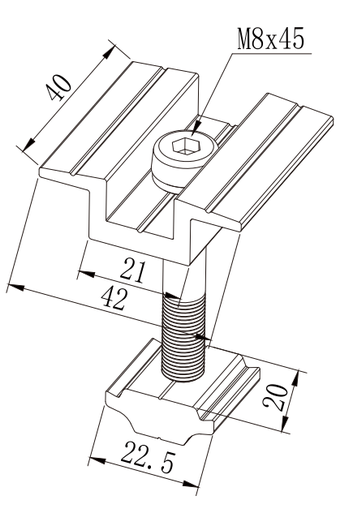


Component List (Qty./Set)			
Mid Clamp	1	T Nut	1
SUS304 Washer	1	Hexagon Bolt(M8*45)	1

Mid Clamp

Product Name	40mm Mid Clamp
Product Code	GM-MC-40-AZ
Application	For framed PV module of 40mm thickness (with Goomax Rails)
Dimensions	L 42xW 40xH 14.3mm
Weight	0.051kg
Material	AL6005-T5
Surface Finish	Anodized (10um)
Packaging	300pcs/carton, 500x300x210mm
Standard	AS/NZS 1170.2



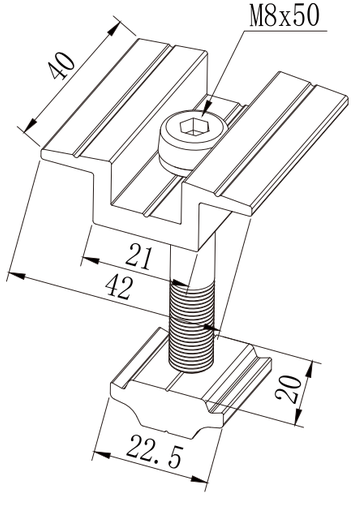


Component List (Qty./Set)			
Mid Clamp	1	T Nut	1
SUS304 Washer	1	Hexagon Bolt(M8*50)	1

Mid Clamp

Product Name	45mm Mid Clamp
Product Code	GM-MC-45-AZ
Application	For framed PV module of 45mm thickness (with Goomax Rails)
Dimensions	L 42xW 40xH 14.3mm
Weight	0.053kg
Material	AL6005-T5
Surface Finish	Anodized (10um)
Packaging	300pcs/carton, 500x300x210mm
Standard	AS/NZS 1170.2



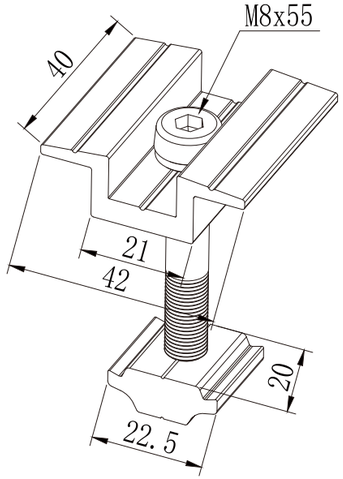


Component List (Qty./Set)			
Mid Clamp	1	T Nut	1
SUS304 Washer	1	Hexagon Bolt(M8*55)	1

GOOMAX

Mid Clamp

Product Name	50mm Mid Clamp
Product Code	GM-MC-50-AZ
Application	For framed PV module of 50mm thickness (with Goomax Rails)
Dimensions	L 42xW 40xH 14.3mm
Weight	0.055kg
Material	AL6005-T5
Surface Finish	Anodized (10um)
Packaging	300pcs/carton, 500x300x210mm
Standard	AS/NZS 1170.2



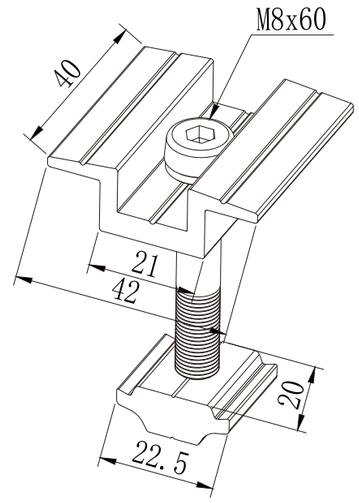


Component List (Qty./Set)			
Mid Clamp	1	T Nut	1
SUS304 Washer	1	Hexagon Bolt(M8*60)	1

Adjustable Mid Clamp

Product Name	30/35mm Mid Clamp
Product Code	GM-MC-30(35)-AZ
Application	Adjustable for framed PV module of 30-35mm thickness (with Goomax Rails)
Dimensions	L 42xW 40xH 14.3mm
Weight	0.051kg
Material	AL6005-T5
Surface Finish	Anodized (10um)
Packaging	300pcs/carton, 500x300x210mm
Standard	AS/NZS 1170.2



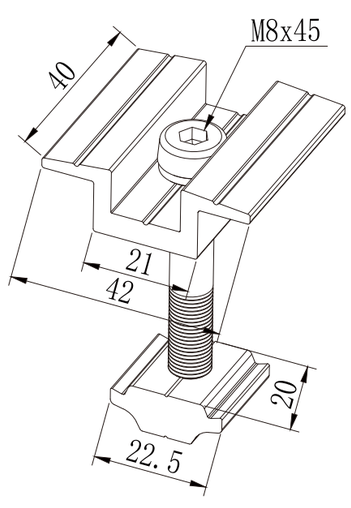


Component List（Qty./Set）			
Mid Clamp	1	T Nut	1
SUS304 Washer	1	Hexagon Bolt(M8*45)	1

Adjustable Mid Clamp

Product Name	30/35mm Mid Clamp
Product Code	GM-MC-30(35)-AZ-1
Application	Adjustable for framed PV module of 30-35mm thickness (with Goomax Rails)
Dimensions	L 40xW 37xH 14mm
Weight	0.052kg
Material	AL6005-T5
Surface Finish	Anodized (10um)
Packaging	300pcs/carton, 500x300x210mm
Standard	AS/NZS 1170.2



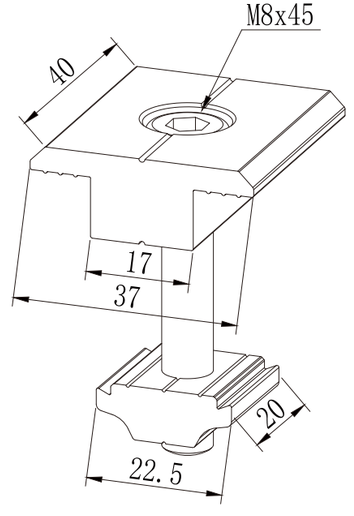


Component List（Qty./Set）			
Mid Clamp	1	T Nut	1
SUS304 Washer	1	Hexagon Bolt(M8*45)	1

Adjustable Mid Clamp

Product Name	35/40mm Mid Clamp
Product Code	GM-MC-30(35)-AZ-4-D
Application	Adjustable for framed PV module of 35-40mm thickness (with Goomax Rails)
Dimensions	L 40xW 37xH 14mm
Weight	0.052kg
Material	AL6005-T5
Surface Finish	Anodized (10um)
Packaging	300pcs/carton, 500x300x210mm
Standard	AS/NZS 1170.2



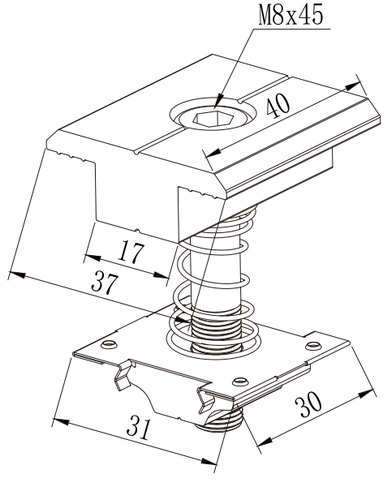


Component List (Qty./Set)			
Mid Clamp	1	Hexagon Bolt(M8*45)	1
SUS304 Washer	1	Spring	1
T Nut	1	Earthing clip	1

Adjustable Mid Clamp

Product Name	Black 30/35mm Mid Clamp
Product Code	GM-MC-30(35)-AZ-4-B
Application	Adjustable for framed PV module of 30-35mm thickness (with Goomax Rails)
Dimensions	L 40xW 37xH 14mm
Weight	0.052kg
Material	AL6005-T5
Surface Finish	Black Anodized
Packaging	300pcs/carton, 500x300x210mm
Standard	AS/NZS 1170.2



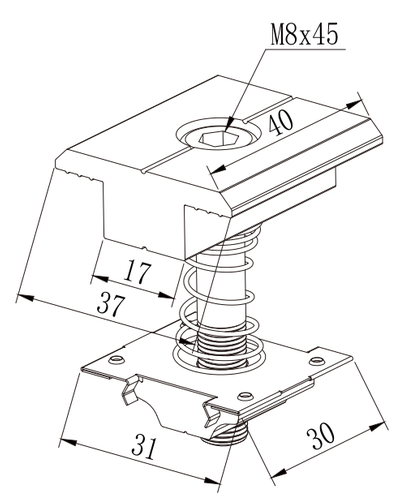


Component List (Qty./Set)			
Mid Clamp	1	Hexagon Bolt(M8*45)	1
SUS304 Washer	1	Spring	1
T Nut	1	Earthing clip	1

Adjustable Mid Clamp

Product Name	Black 30/35mm Mid Clamp with
Product Code	GM-MC-30(35)-AZ-2-B
Application	Adjustable for framed PV module of 30-35mm thickness (with Goomax Rails)
Dimensions	L 42xW 40xH 14.3mm
Weight	0.052kg
Material	AL6005-T5
Surface Finish	Black Anodized
Packaging	300pcs/carton, 500x300x210mm
Standard	AS/NZS 1170.2



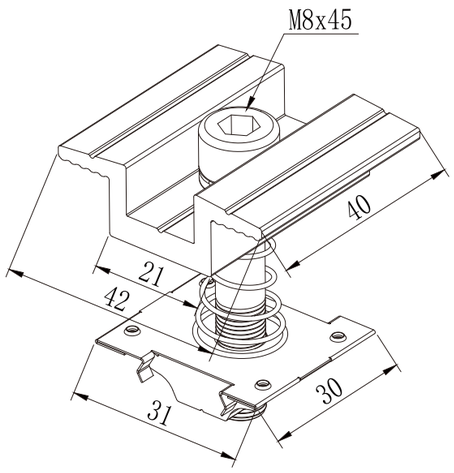


Component List (Qty./Set)			
Mid Clamp	1	Hexagon Bolt(M8*45)	1
SUS304 Washer	1	Spring	1
T Nut	1	Earthing clip	1

Adjustable Mid Clamp

Product Name	35/40mm Mid Clamp
Product Code	GM-MC-35(40)-AZ
Application	Adjustable for framed PV module of 35-40mm thickness (with Goomax Rails)
Dimensions	L 42xW 40xH 14.3mm
Weight	0.053kg
Material	AL6005-T5
Surface Finish	Anodized (10um)
Packaging	300pcs/carton, 500x300x210mm
Standard	AS/NZS 1170.2



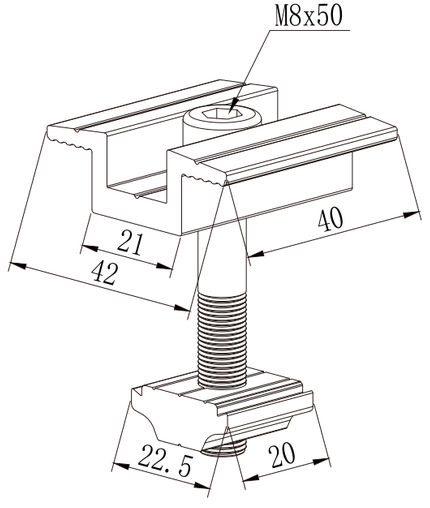


Component List (Qty./Set)			
Mid Clamp	1	T Nut	1
SUS304 Washer	1	Hexagon Bolt(M8*50)	1

Adjustable Mid Clamp

Product Name	30/40mm Mid Clamp
Product Code	GM-MC-30(40)-AZ
Application	Adjustable for framed PV module of 30-40mm thickness (with Goomax Rails)
Dimensions	L 46xW 40xH 12mm
Weight	0.053kg
Material	AL6005-T5
Surface Finish	Anodized (10um)
Packaging	300pcs/carton, 500x300x210mm
Standard	AS/NZS 1170.2



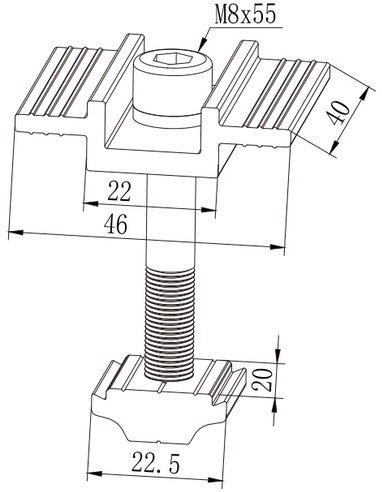


Component List (Qty./Set)			
Mid Clamp	1	T Nut	1
SUS304 Washer	1	Hexagon Bolt(M8*55)	1

Adjustable Mid Clamp

Product Name	35/40mm Mid Clamp
Product Code	GM-MC-35(40)-AZ-1
Application	Adjustable for framed PV module of 35-40mm thickness (with Goomax Rails)
Dimensions	L 40xW 37xH 14mm
Weight	0.053kg
Material	AL6005-T5
Surface Finish	Anodized (10um)
Packaging	300pcs/carton, 500x300x210mm
Standard	AS/NZS 1170.2



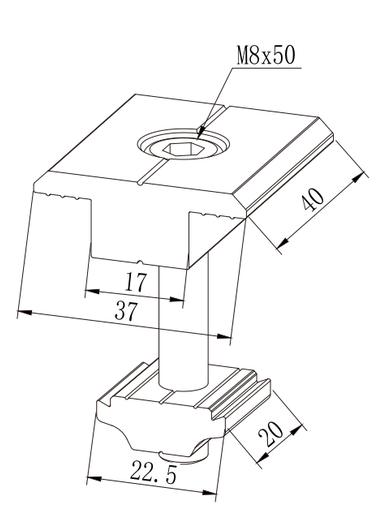


Component List (Qty./Set)			
Mid Clamp	1	T Nut	1
SUS304 Washer	1	Hexagon Bolt(M8*50)	1

Adjustable Mid Clamp

Product Name	30/35mm Mid Clamp with earthing clip
Product Code	GM-MC-30(35)-AZ-2
Application	Adjustable for framed PV module of 30-35mm thickness (with Goomax Rails)
Dimensions	L 42xW 40xH 14.3mm
Weight	0.052kg
Material	AL6005-T5
Surface Finish	Anodized (10um)
Packaging	300pcs/carton, 500x300x210mm
Standard	AS/NZS 1170.2



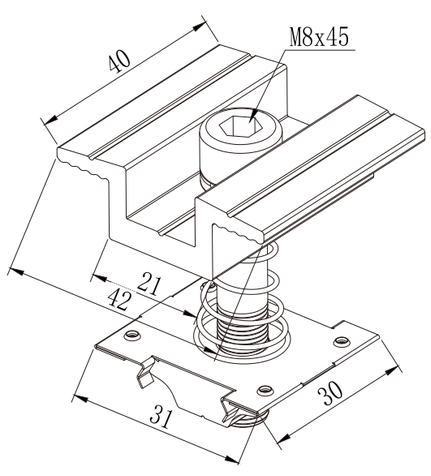


Component List（Qty./Set）			
Mid Clamp	1	Hexagon Bolt(M8*45)	1
SUS304 Washer	1	Spring	1
T Nut	1	Earthing clip	1

Adjustable Mid Clamp

Product Name	35-50mm Adjustable Mid Clamp
Product Code	GM-MC-35/50-D
Application	Adjustable for framed PV module of 35-50mm thickness (with Goomax Rails)
Dimensions	L 45.6xW 52.9xH 40mm
Weight	0.0761kg
Material	AL6005-T5
Surface Finish	Anodized (10um)
Packaging	300pcs/carton, 500x300x210mm
Standard	AS/NZS 1170.2



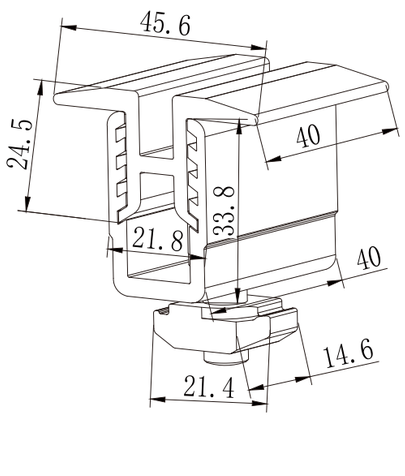


Component List（Qty./Set）			
Adjustable Mid Clamp A	1	T Nut	1
Adjustable Mid Clamp B	1	Hexagon Bolt(M8*20)	1
SUS304 Washer	1		

Adjustable Mid Clamp

Product Name	Mid Clamp 30-35mm (L50)
Product Code	GM-MC-30(35)-50-AZ-4
Application	Adjustable for framed PV module of 30-35mm thickness (with Goomax Rails)
Dimensions	L 50xW 37xH 14mm
Weight	0.078kg
Material	AL6005-T5
Surface Finish	Anodized (10 micron)
Packaging	250pcs./carton , 500x300x210mm
Standard	AS/NZS 1170.2



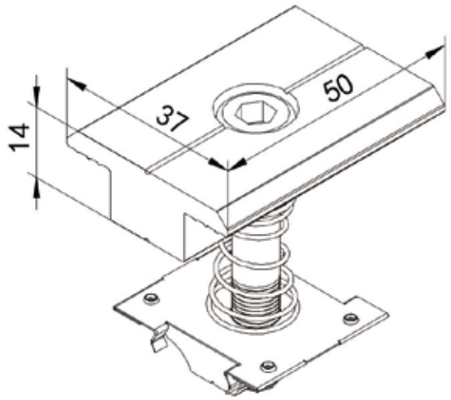


Component List（Qty./Set）			
Mid clamp L50	1	Hexagon Bolt(M8*45)	1
SUS304 Washer	1	Spring	1
T Nut	1	Earthing clip	1

Adjustable Mid Clamp

Product Name	BLACK Mid Clamp 30-35mm (L50)
Product Code	GM-MC-30(35)-50-AZ-4-B
Application	Adjustable for framed PV module of 30-35mm thickness (with Goomax Rails)
Dimensions	L 50xW 37xH 14mm
Weight	0.078kg
Material	AL6005-T5
Surface Finish	Anodized (10 micron)
Packaging	250pcs./carton , 500x300x210mm
Standard	AS/NZS 1170.2



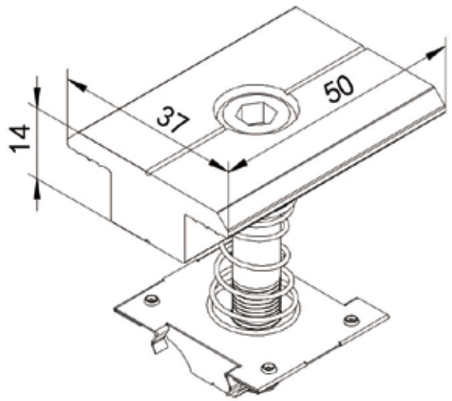


Component List（Qty./Set）			
Mid clamp L50	1	Hexagon Bolt(M8*45)	1
SUS304 Washer	1	Spring	1
T Nut	1	Earthing clip	1

Adjustable Mid Clamp

Product Name	Mid Clamp 30-35mm (L50)
Product Code	GM-MC-30(35)-50-AZ-2
Application	Adjustable for framed PV module of 30-35mm thickness (with Goomax Rails)
Dimensions	L 50xW 42xH 14.3mm
Weight	0.06kg
Material	AL6005-T5
Surface Finish	Anodized (10 micron)
Packaging	250pcs./carton , 500x300x210mm
Standard	AS/NZS 1170.2



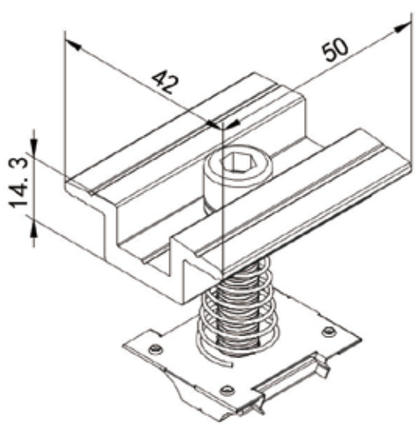


Component List（Qty./Set）			
Mid clamp L50	1	Hexagon Bolt(M8*45)	1
SUS304 Washer	1	Spring	1
T Nut	1	Earthing clip	1

Adjustable Mid Clamp

Product Name	BLACK Mid Clamp 30-35mm (L50)
Product Code	GM-MC-30(35)-50-AZ-2-B
Application	Adjustable for framed PV module of 30-35mm thickness (with Goomax Rails)
Dimensions	L 50xW 42xH 14.3mm
Weight	0.06kg
Material	AL6005-T5
Surface Finish	Black Anodized (10 micron)
Packaging	250pcs./carton , 500x300x210mm
Standard	AS/NZS 1170.2




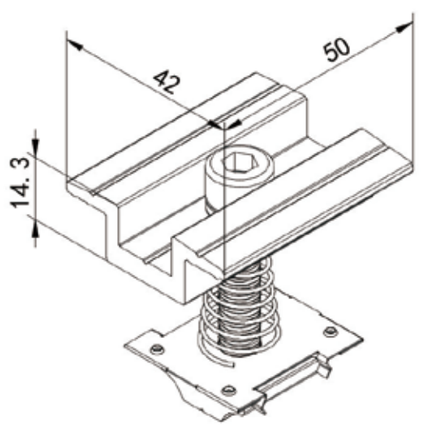


Component List（Qty./Set）			
Mid clamp L50	1	Hexagon Bolt(M8*45)	1
SUS304 Washer	1	Spring	1
T Nut	1	Earthing clip	1

Adjustable End Clamp

Product Name	28/30mm End Clamp
Product Code	GM-EC-28(30)-AZ
Application	Adjustable for framed PV module of 30mm and 35mm thickness (with Goomax Rails)
Dimensions	L 33.5xW 40xH 31.5mm
Weight	0.053kg
Material	AL6005-T5
Surface Finish	Anodized (10um)
Packaging	300pcs/carton, 500x300x210mm
Standard	AS/NZS 1170.2

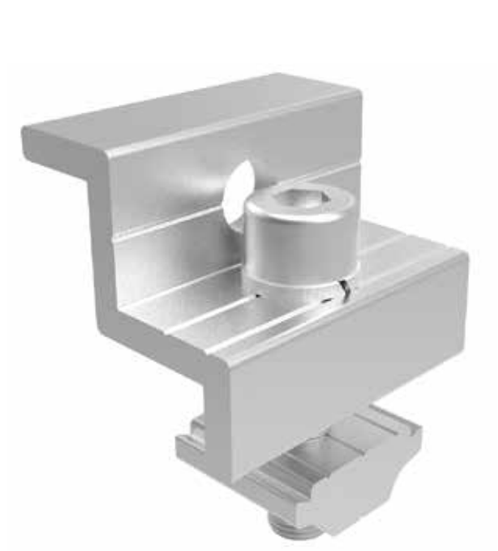

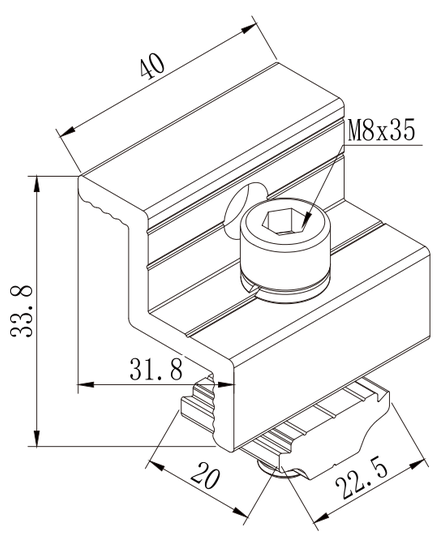


Component List (Qty./Set)			
Mid Clamp	1	T Nut	1
SUS304 Washer	1	Hexagon Bolt(M8*35)	1

GOOMAX

Adjustable End Clamp

Product Name	30/32mm End Clamp
Product Code	GM-EC-30(32)-AZ
Application	Adjustable for framed PV module of 30mm and 35mm thickness (with Goomax Rails)
Dimensions	L 33.5xW 40xH 35.5mm
Weight	0.055kg
Material	AL6005-T5
Surface Finish	Anodized (10um)
Packaging	300pcs/carton, 500x300x210mm
Standard	AS/NZS 1170.2




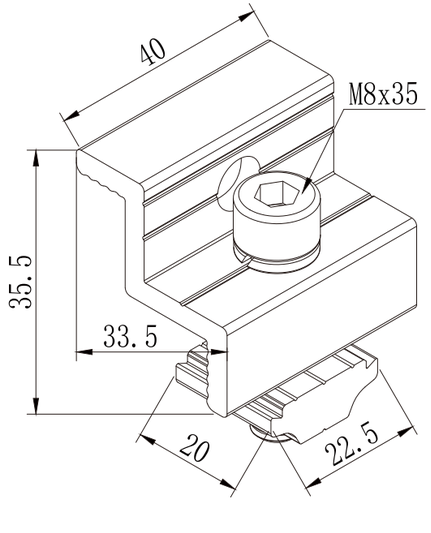


Component List (Qty./Set)			
Mid Clamp	1	T Nut	1
SUS304 Washer	1	Hexagon Bolt(M8*35)	1

Adjustable End Clamp

Product Name	30/35mm End Clamp
Product Code	GM-EC-30(35)-AZ
Application	Adjustable for framed PV module of 30mm and 35mm thickness (with Goomax Rails)
Dimensions	L 22.5xW 20xH 38.5mm
Weight	0.055kg
Material	AL6005-T5
Surface Finish	Anodized (10um)
Packaging	300pcs/carton, 500x300x210mm
Standard	AS/NZS 1170.2

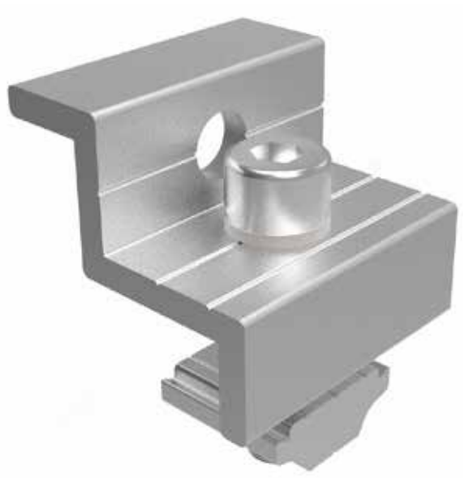

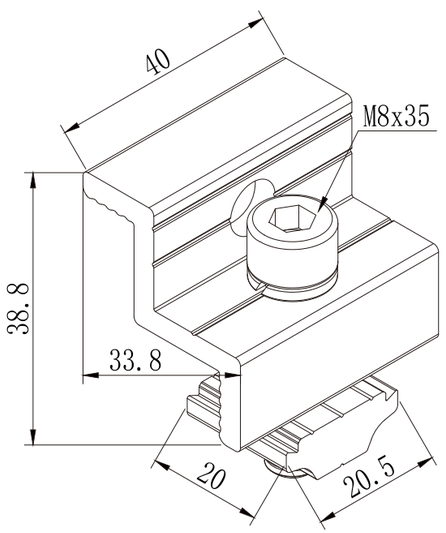


Component List (Qty./Set)			
End Clamp	1	T Nut	1
SUS304 Washer	1	Hexagon Bolt(M8*35)	1

GOOMAX

Adjustable End Clamp

Product Name	Black 30/35mm End Clamp
Product Code	GM-EC-30(35)-AZ-B
Application	Adjustable for framed PV module of 30mm and 35mm thickness (with Goomax Rails)
Dimensions	L 22.5xW 20xH 38.5mm
Weight	0.055kg
Material	AL6005-T5
Surface Finish	Black Anodized
Packaging	300pcs/carton, 500x300x210mm
Standard	AS/NZS 1170.2



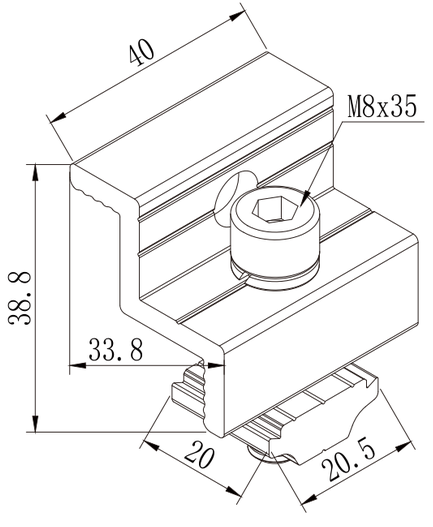


Component List (Qty./Set)			
End Clamp	1	T Nut	1
SUS304 Washer	1	Hexagon Bolt(M8*35)	1

Adjustable End Clamp

Product Name	30/40mm End Clamp
Product Code	GM-EC-30(40)-AZ
Application	Adjustable for framed PV module of 30mm and 40mm thickness (with Goomax Rails)
Dimensions	L 30.8xW 38.5xH 40mm
Weight	0.058kg
Material	AL6005-T5
Surface Finish	Anodized (10um)
Packaging	300pcs/carton, 500x300x210mm
Standard	AS/NZS 1170.2



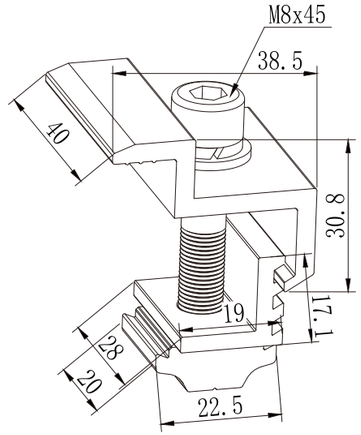


Component List（Qty./Set）			
End Clamp	1	T Nut	1
Base	1	Hexagon Bolt(M8*45)	1
SUS304 Washer	1		

Adjustable End Clamp

Product Name	35/40mm End Clamp
Product Code	GM-EC-35(40)-AZ
Application	Adjustable for framed PV module of 35mm and 40mm thickness (with Goomax Rails)
Dimensions	L 22.5xW 20xH 43.5mm
Weight	0.057kg
Material	AL6005-T5
Surface Finish	Anodized (10um)
Packaging	300pcs/carton, 500x300x210mm
Standard	AS/NZS 1170.2



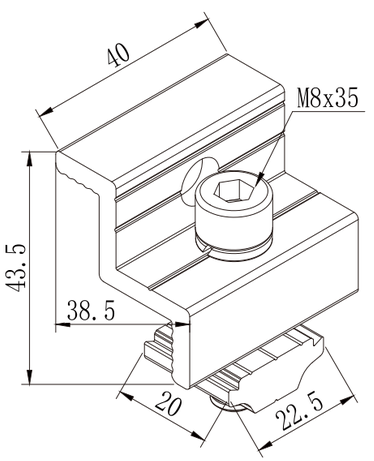


Component List（Qty./Set）			
End Clamp	1	T Nut	1
SUS304 Washer	1	Hexagon Bolt(M8*35)	1

Adjustable End Clamp

Product Name	35-50mm Adjustable End Clamp
Product Code	GM-EC-35/50-D
Application	Adjustable for framed PV module of 35mm to 50mm thickness (with Goomax Rails)
Dimensions	L 40xW 34.5xH 60mm
Weight	0.064kg
Material	AL6005-T5
Surface Finish	Anodized (10um)
Packaging	300pcs/carton, 500x300x210mm
Standard	AS/NZS 1170.2



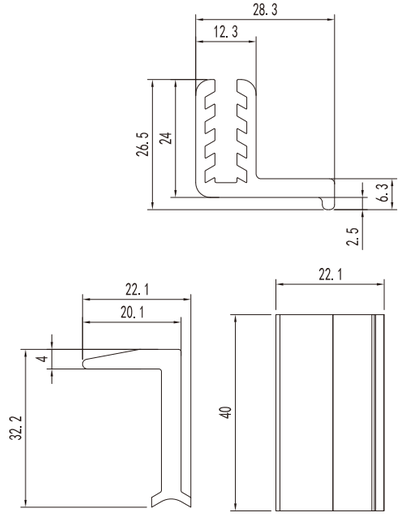


Component List（Qty./Set）			
Adjustable End Clamp A	1	T Nut	1
Adjustable End Clamp B	1	Hexagon Bolt(M8*20)	1
SUS304 Washer	1		

Thin Film Mid Clamp

Product Name	Thin Film Mid Clamp
Product Code	GM-MC-60-TF2-AZ
Application	For thin film PV module of 5-8mm thickness (with Goomax Rails)
Dimensions	L 60xW 55.5xH 19.5mm
Weight	0.047kg
Material	AL6005-T5
Surface Finish	Anodized (10um)
Packaging	300pcs/carton, 500x300x210mm
Standard	AS/NZS 1170.2



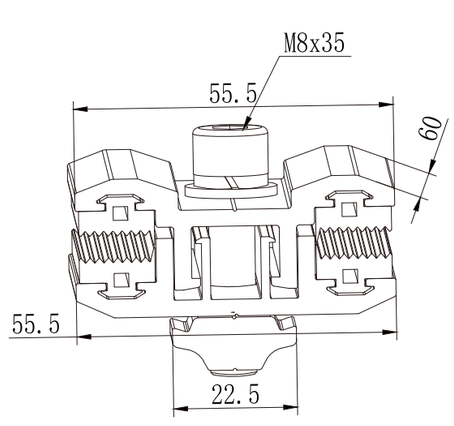


Component List（Qty./Set）			
Thin Film Mid Clamp A	1	T Nut	1
Thin Film Mid Clamp B	1	Hexagon Bolt(M8*35)	1
SUS304 Washer	1	Rubber Washer	4

Thin Film End Clamp

Product Name	Thin Film End Clamp
Product Code	GM-EC-60-TF2-AZ
Application	For thin film PV module of 5-8mm thickness (with Goomax Rails)
Dimensions	L 60xW 41.5xH 16.8mm
Weight	0.047kg
Material	AL6005-T5
Surface Finish	Anodized (10um)
Packaging	300pcs/carton, 500x300x210mm
Standard	AS/NZS 1170.2



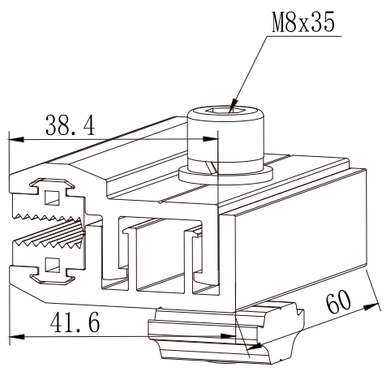


Component List（Qty./Set）			
Thin FilmEnd Clamp A	1	T Nut	1
Thin Film End Clamp B	1	Hexagon Bolt(M8*35)	1
SUS304 Washer	1	Rubber Washer	2

End Clamp

Product Name	30mm End Clamp
Product Code	GM-EC-30-AZ
Application	For framed PV module of 30mm thickness (with Goomax Rails)
Dimensions	L 22.5xW 20xH 29.5mm
Weight	0.05kg
Material	AL6005-T5
Surface Finish	Anodized (10um)
Packaging	300pcs/carton, 500x300x210mm
Standard	AS/NZS 1170.2



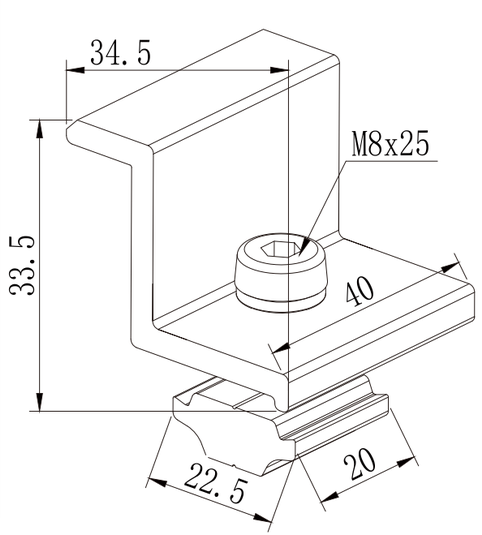


Component List（Qty./Set）			
End Clamp	1	T Nut	1
SUS304 Washert	1	Hexagon Bolt(M8*25)	1

End Clamp

Product Name	35mm End Clamp
Product Code	GM-EC-35-AZ
Application	For framed PV module of 35mm thickness (with Goomax Rails)
Dimensions	L 22.5xW 20xH 34.5mm
Weight	0.052kg
Material	AL6005-T5
Surface Finish	Anodized (10um)
Packaging	300pcs/carton, 500x300x210mm
Standard	AS/NZS 1170.2



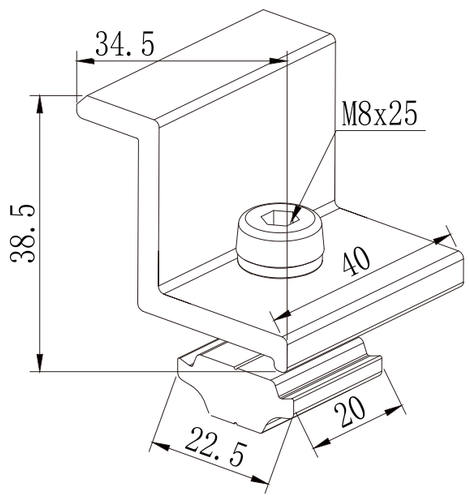


Component List (Qty./Set)			
End Clamp	1	T Nut	1
SUS304 Washer	1	Hexagon Bolt(M8*25)	1

End Clamp

Product Name	40mm End Clamp
Product Code	GM-EC-40-AZ
Application	For framed PV module of 40mm thickness (with Goomax Rails)
Dimensions	L 22.5xW 20xH 41mm
Weight	0.054kg
Material	AL6005-T5
Surface Finish	Anodized (10um)
Packaging	300pcs/carton, 500x300x210mm
Standard	AS/NZS 1170.2



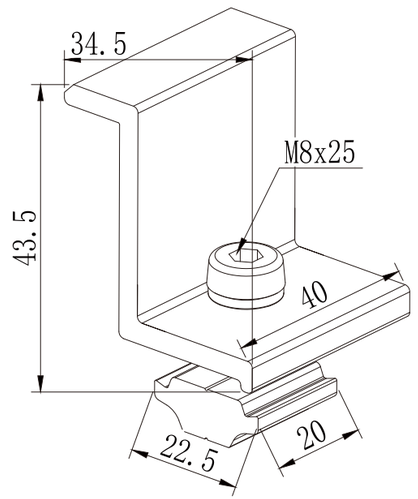


Component List (Qty./Set)			
End Clamp	1	T Nut	1
SUS304 Washer	1	Hexagon Bolt(M8*25)	1

End Clamp

Product Name	45mm End Clamp
Product Code	GM-EC-45-AZ
Application	For framed PV module of 45mm thickness (with Goomax Rails)
Dimensions	L 22.5xW 20xH 46mm
Weight	0.056kg
Material	AL6005-T5
Surface Finish	Anodized (10um)
Packaging	300pcs/carton, 500x300x210mm
Standard	AS/NZS 1170.2



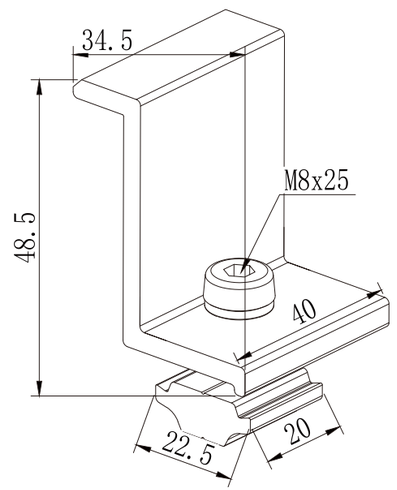


Component List (Qty./Set)			
End Clamp	1	T Nut	1
SUS304 Washer	1	Hexagon Bolt(M8*25)	1

End Clamp

Product Name	50mm End Clamp
Product Code	GM-EC-50-AZ
Application	For framed PV module of 50mm thickness (with Goomax Rails)
Dimensions	L 22.5xW 20xH 51mm
Weight	0.058kg
Material	AL6005-T5
Surface Finish	Anodized (10um)
Packaging	300pcs/carton, 500x300x210mm
Standard	AS/NZS 1170.2




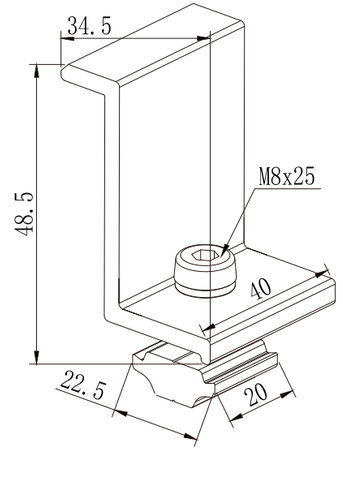

Component List (Qty./Set)			
End Clamp	1	T Nut	1
SUS304 Washer	1	Hexagon Bolt(M8*25)	1

Adjustable End Clamp

Product Name	End Clamp 30-35mm (L50)
Product Code	GM-EC-30(35)-50-AZ
Application	Adjustable for framed PV module of 30-35mm thickness (with Goomax Rails)
Dimensions	L 50xW 33.5xH 38.5mm
Weight	0.066kg
Material	AL6005-T5
Surface Finish	Anodized (10 micron)
Packaging	250pcs./carton , 500x300x210mm
Standard	AS/NZS 1170.2

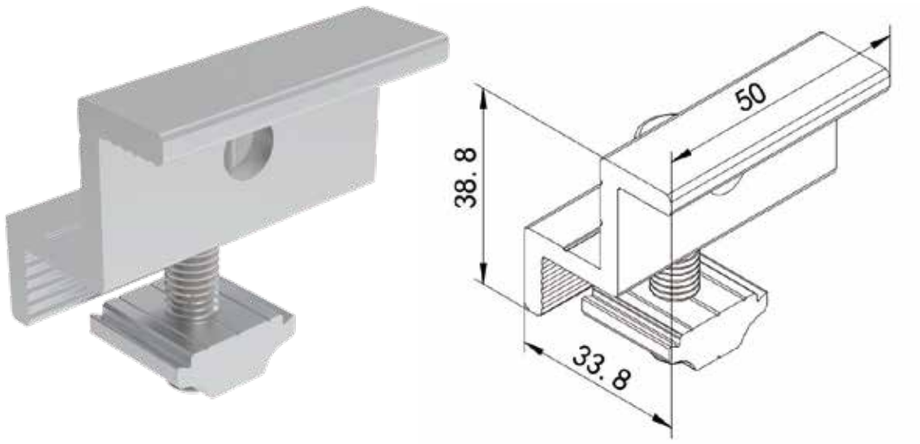


Component List（Qty./Set）			
End clamp L50	1	Hexagon Bolt(M8*35)	1
SUS304 Washer	1	T Nut	1

GOOMAX

Adjustable End Clamp

Product Name	BLACK End Clamp 30-35mm (L50)
Product Code	GM-EC-30(35)-50-AZ-B
Application	Adjustable for framed PV module of 30-35mm thickness (with Goomax Rails)
Dimensions	L 50xW 33.5xH 38.5mm
Weight	0.066kg
Material	AL6005-T5
Surface Finish	Anodized (10 micron)
Packaging	250pcs./carton , 500x300x210mm
Standard	AS/NZS 1170.2

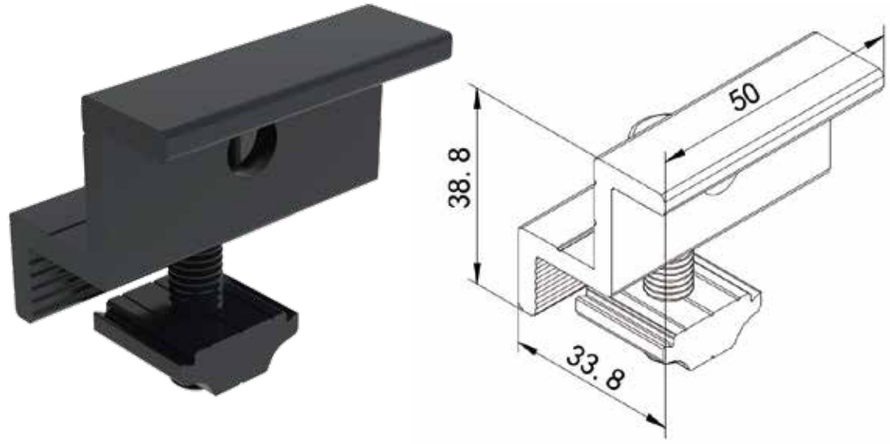


Component List（Qty./Set）			
End clamp L50	1	Hexagon Bolt(M8*35)	1
SUS304 Washer	1	T Nut	1

Mid/End Universal Clamp

Product Name	28-35mm Mid/End Universal Clamp with Earthing Clip
Product Code	GM-MK-UC(28-35)-AZ
Application	Adjustble For framed PV modules of 28-35mm thickness (with Goomax Rails)
Dimensions	L 46.6xW 40xH 52.6mm
Weight	0.078kg
Material	AL6005-T5
Surface Finish	Anodized (10 micron)
Packaging	300pcs./carton , 500x300x210mm
Standard	AS/NZS 1170.2



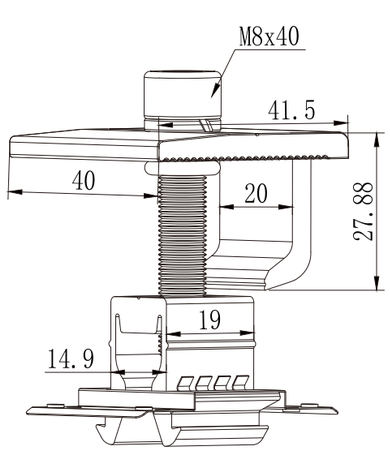


Component List（Qty./Set）			
28/35 Universal clamp A	1	Hexagon Bolt(M8*40)	1
28/35 Universal clamp B	1	SUS304 Washer	1
Earthing Washer	1	Spring	1

GOOMAX

Mid/End Universal Clamp

Product Name	Black 28-35mm Mid/End Universal Clamp with Earthing Clip
Product Code	GM-MK-UC(28-35)-AZ-B
Application	Adjustble For framed PV modules of 28-35mm thickness (with Goomax Rails)
Dimensions	L 46.6xW 40xH 52.6mm
Weight	0.078kg
Material	AL6005-T5
Surface Finish	Anodized (10 micron)
Packaging	300pcs./carton , 500x300x210mm
Standard	AS/NZS 1170.2



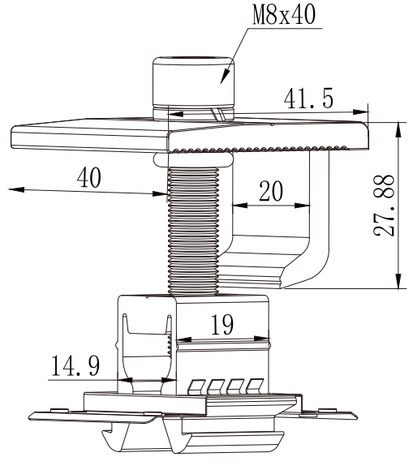


Component List（Qty./Set）			
28/35 Universal clamp A	1	Hexagon Bolt(M8*40)	1
28/35 Universal clamp B	1	SUS304 Washer	1
Earthing Washer	1	Spring	1

Cable Clip

Product Name	Goomax Cable Clip
Product Code	GM-XJ-AZ
Application	Silver Cable Clip for 2 Cables for Framed PV Module only
PV Module Frame Thickness	1.3-2.0mm
Max Cable Size	10mm ^{2}
Dimensions	L 20.8 xW 18.2mm
Weight	0.0042kg/pc
Material	SUS304
Packaging	100pcs/bag, 5000pcs/carton, 500x300x210mm
Standard	AS/NZS 1170.2



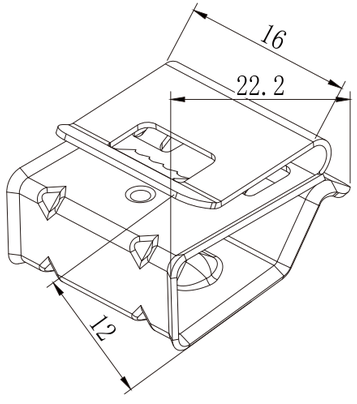


Component List (Qty./Set)	
Cable Clip	1

Earthing Clip

Product Name	Goomax Earthing Washer
Product Code	GM-E-EL-AZ
Application	Earthing Washers
Dimensions	L 30.1 xW 31.8mm
Weight	0.002 kg/pc
Material	SUS304
Packaging	100pcs/bag, 5000pcs/carton, 500x300x210mm
Standard	AS/NZS 1170.2



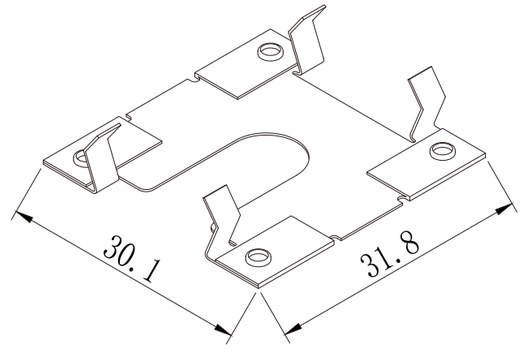


Component List (Qty./Set)	
Earthing Washer	1

Earthing Clip

Product Name	Goomax Earthing Washer
Product Code	GM-E-EL-12
Application	Earthing Washers for Preassembled Kits
Dimensions	L 30 xW 31.04mm
Weight	0.002 kg/pc
Material	SUS304
Packaging	100pcs/bag, 5000pcs/carton, 500x300x210mm
Standard	AS/NZS 1170.2




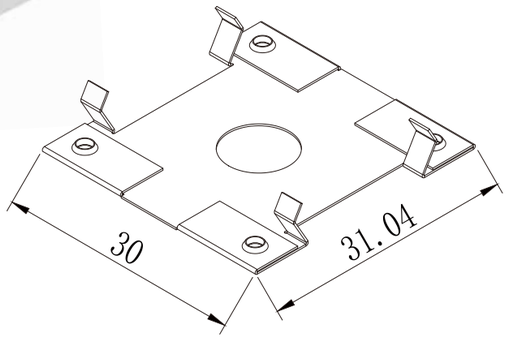


Component List (Qty./Set)	
Earthing Washer	1

Earthing Clip

Product Name	Goomax Earthing Washer
Product Code	GM-E-EL-04
Application	Earthing Washer for End Clamp
Dimensions	L 50 xW 29.7mm
Weight	3g/pc
Material	SUS304
Packaging	100pcs/bag, 5000pcs/carton, 500x300x210mm
Standard	AS/NZS 1170.2

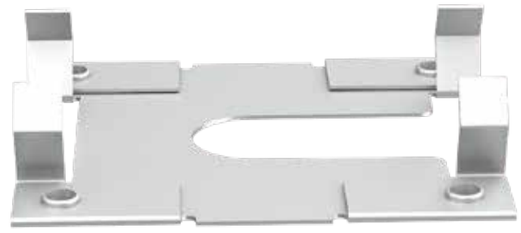

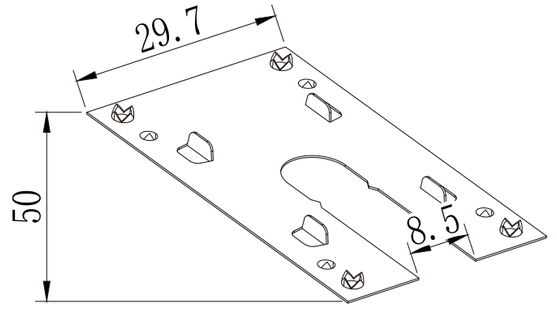


Component List (Qty./Set)	
Earthing Washer	1

Grounding Lug

Product Name	Goomax Grounding Lug
Product Code	GM-EK-AZ
Application	Grounding Lug for Goomax's PV Mounting Systems
Max Cable Size	35mm ²
Dimensions	L 44xH 15mm
Weight	0.0496kg/pc
Material	AL6005-T5, Botls: SUS304
Surface Finish	Anodized (10um)
Packaging	400pcs/carton, 500x300x210mm
Standard	AS/NZS 1170.2



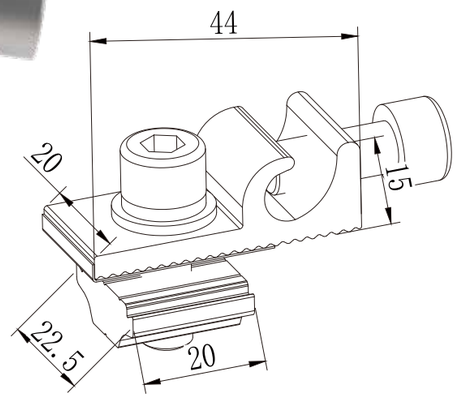


Component List（Qty./Set）			
Grounding Lug	1	T Nut	1
SUS304 Bolts and Washers	2	Earthing Washer	1

Grounding Lug

Product Name	Black Grounding Lug
Product Code	GM-EK-AZ-B
Application	Grounding Lug for Goomax's PV Mounting Systems
Max Cable Size	35mm ²
Dimensions	L 44xH 15mm
Weight	0.16kg/pc
Material	AL6005-T5, Botls: SUS304
Surface Finish	Black Anodized
Packaging	400pcs/carton, 500x300x210mm
Standard	AS/NZS 1170.2



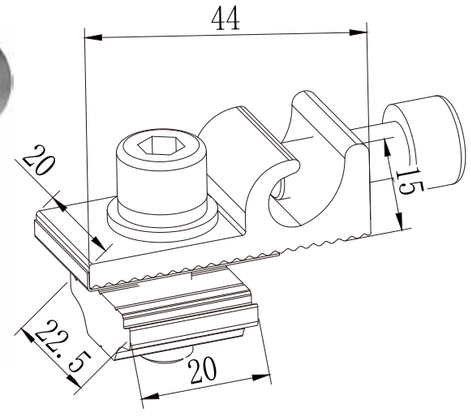


Component List（Qty./Set）			
Grounding Lug	1	T Nut	1
SUS304 Bolts and Washers	2	Earthing Washer	1

Metal Roof Brackets

Product Name	Goomax Kliplok 406 Interface
Product Code	GM-MRH-06-AZ
Application	Non-penetrative Installation on Lysaght KlipLok 406 Roofsheet
Dimensions	L 65xH 57.47mm
Weight	0.15kg/pc
Material	AL6005-T5, Botls: SUS304, Rubber Pad: EPDM
Surface Finish	Anodized (10um)
Packaging	168pcs/carton, 500x300x210mm
Standard	AS/NZS 1170.2



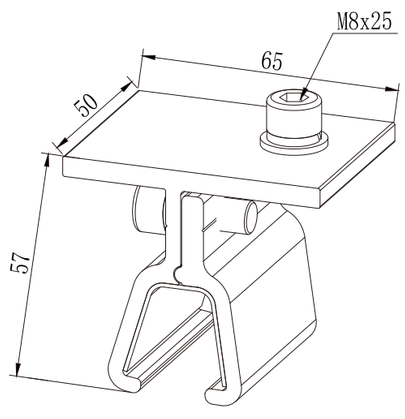


Component List (Qty./Set)			
Bracket Parts	2	SUS304 Bolts and Washers	3
EPDM Rubber Pad	1		

Metal Roof Brackets

Product Name	Goomax Kliplok 700 Interface
Product Code	GM-MRH-07-AZ
Application	Non-penetrative Installation on Lysaght KlipLok 700 Roofsheet/Fielders Kingklip 700 Roofsheet
Dimensions	L 100xH52.2mm
Weight	0.35kg/pc
Material	AL6005-T5, Botls: SUS304, Rubber Pad: EPDM
Surface Finish	Anodized (10um)
Packaging	60pcs/carton, 500x300x210mm
Packaging with L Feet Preassembled	30pcs/carton, 500x300x210mm
Standard	AS/NZS 1170.2



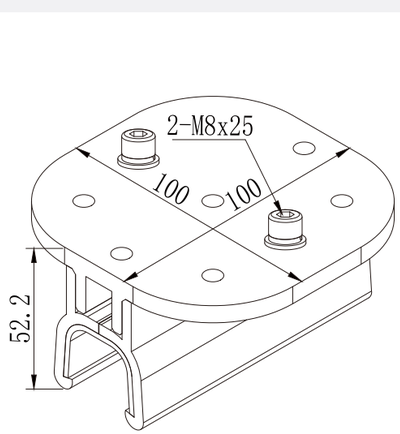


Component List (Qty./Set)			
Bracket Parts	3	SUS304 Bolts and Washers	6
EPDM Rubber Pad	1		

Metal Roof Brackets

Product Name	Goomax Kliplok 700 Interface with L feet
Product Code	GM-MRH-07L-AZ
Application	Non-penetrative Installation on Lysaght KlipLok 700 Roofsheet/Fielders Kingklip 700 Roofsheet
Dimensions	L 100xH132.2mm
Weight	0.45kg/pc
Material	AL6005-T5, Botls: SUS304, Rubber Pad: EPDM
Surface Finish	Anodized (10um)
Packaging	30pcs/carton, 500x300x210mm
Standard	AS/NZS 1170.2



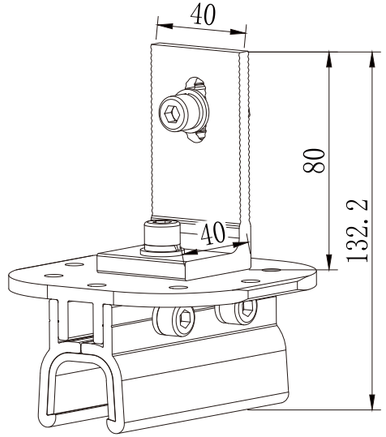


Component List（Qty./Set）			
Bracket Parts	3	SUS304 Washer Set	2
EPDM Rubber Pad	1	T Nut	1
SUS304 Bolts and Washers	6	Hexagon Bolt Set (M8*25)	1
L Feet	1		

GOOMAX

Metal Roof Brackets

Product Name	Goomax Kliplok 305 Interface
Product Code	GM-MRH-18-AZ
Application	Non-penetrative Installation on Lysaght Longline 305
Dimensions	L 100xH 70mm
Weight	0.38kg/pc
Material	AL6005-T5, Botls: SUS304, Rubber Pad: EPDM
Surface Finish	Anodized (10um)
Packaging	60pcs/carton, 500x300x210mm
Packaging with L Feet Preassembled	30pcs/carton, 500x300x210mm
Standard	AS/NZS 1170.2



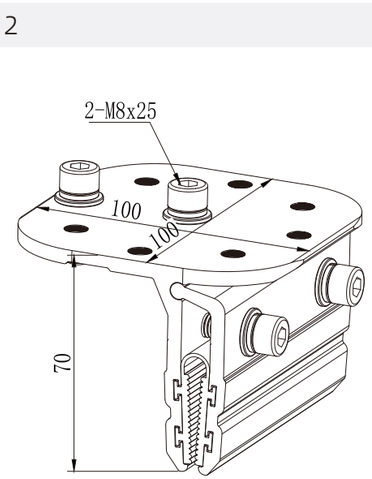


Component List（Qty./Set）			
Bracket Parts	2	SUS304 Bolts and Washers	4
EPDM Rubber Pad	1		

Metal Roof Brackets

Product Name	Goomax Universal Kliplok 406&700 Interface -Small
Product Code	GM-MRH-19-AZ
Application	Non-penetrative Installation on Lysaght 406,Lysaght 700
Dimensions	L 65xH 54.33mm
Weight	0.17kg/pc
Material	AL6005-T5, Botls: SUS304, Rubber Pad: EPDM
Surface Finish	Anodized (10um)
Packaging	120pcs/carton, 500x300x210mm
Standard	AS/NZS 1170.2





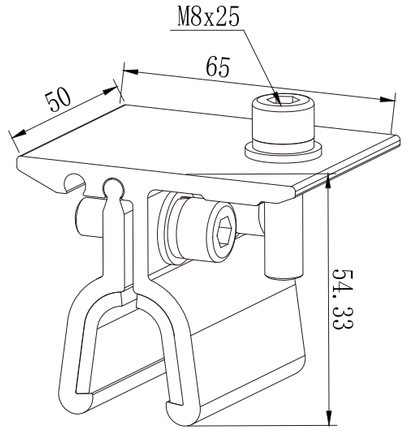


Component List (Qty./Set)			
Bracket Parts	2	SUS304 Bolts and Washers	3
EPDM Rubber Pad	2		


GOOMAX

Metal Roof Brackets

Product Name	Goomax Universal Kliplok 406&700 Interface -Big
Product Code	GM-MRH-20-AZ
Application	Non-penetrative Installation on Lysaght 406, Lysaght 700
Dimensions	L 100xH 54.33mm
Weight	0.34kg/pc
Material	AL6005-T5, Botls: SUS304, Rubber Pad: EPDM
Surface Finish	Anodized (10um)
Packaging	60pcs/carton, 500x300x210mm
Standard	AS/NZS 1170.2

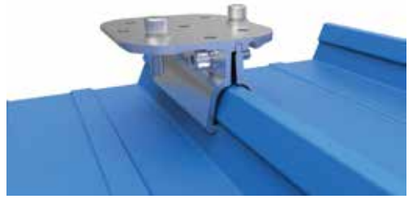



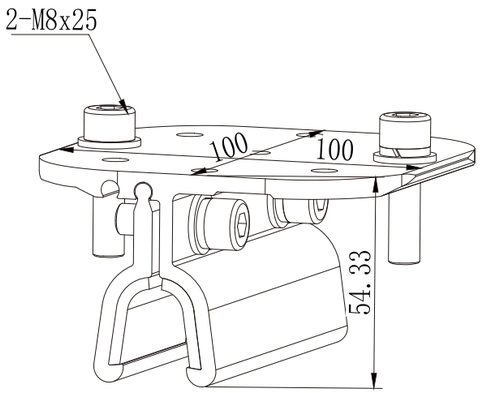


Component List (Qty./Set)			
Bracket Parts	2	SUS304 Bolts and Washers	4
EPDM Rubber Pad	2		

Trapezoidal Roof Clamp

Product Name	Goomax Trapezoidal Roof Clamp
Product Code	GM-MRH-T4-AZ
Application	Penetrative Installation on Trapezoidal Roof
Dimensions	L 57.14xH 114.81mm
Weight	0.19kg/pc
Material	AL6005-T5, Botls: SUS304, Rubber Pad: EPDM
Surface Finish	Anodized (10um)
Packaging	40pcs/carton, 500x300x210mm
Standard	AS/NZS 1170.2




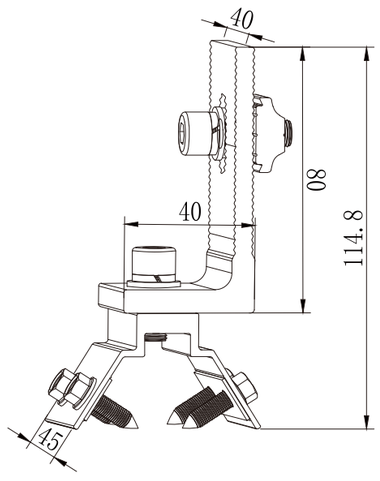


Component List（Qty./Set）			
L Feet with T Nut Set	1	SUS304 Bolts and Washers	2
Bracket	1	ST5.5*19 Screws（SUS304）	4
EPDM Rubber Pad	2		

Arc Rail

Product Name	Goomax Arc Rail
Product Code	GM-ARC55
Application	Commercial Tin Roof/Concrete Flat Roof
Dimensions	W 33.2mmxH 55mm
Weight	0.694kg/m
Material	AL6005-T5
Surface Finish	Anodized (10um)
Packaging	4pcs/package,540pcs/pallet
Standard	AS/NZS 1170.2

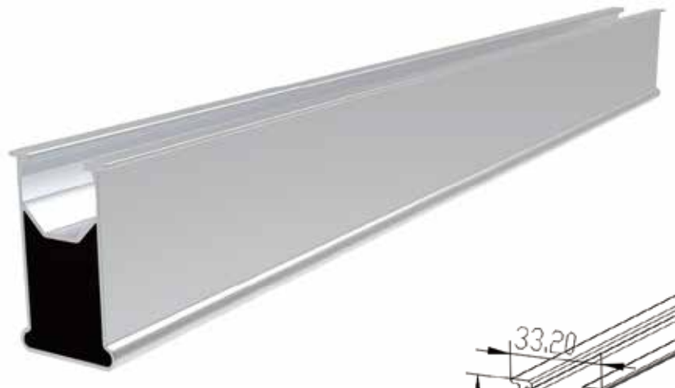


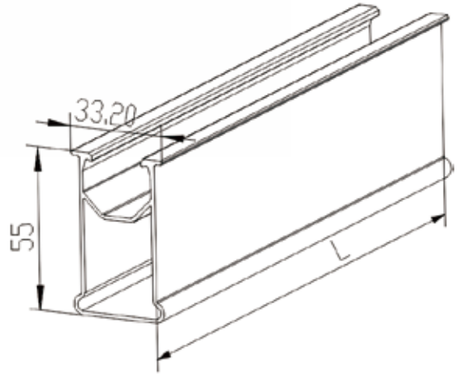

Arc Rail joiner

Product Name	Goomax Arc Rail joiner
Product Code	GM-RS-ARC55
Application	Connect Goomax rails for longer PV array and pierce rail's surfaces for earthing
Dimensions	L 150xW 29.5xH 37.1mm
Weight	0.109kg
Material	AL6005-T5, Pierce Part:SUS304
Surface Finish	Anodized (10um)
Packaging	126pcs/carton , 500x300x210mm
Standard	AS/NZS 1170.2



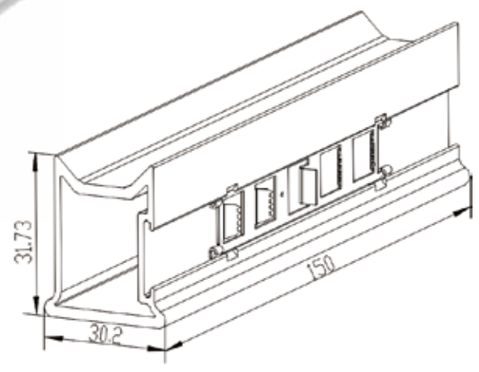


Component List（Qty./Set）			
Joiner	1	Pierce Part(SUS304)	1

Arc Universal Panel Clamp

Product Name	28/35 Arc Universal Panel Clamp
Product Code	GM-ARC-UC(28-35)-AZ
Application	Adjustble for framed PV modules of 28-35mm thickness(with Goomax Rails)
Dimensions	L 46.6xW 40xH 52.6mm
Weight	0.078kg
Material	AL6005-T5
Surface Finish	Anodized (10um)
Packaging	300pcs/carton , 500x300x210mm
Standard	AS/NZS 1170.2




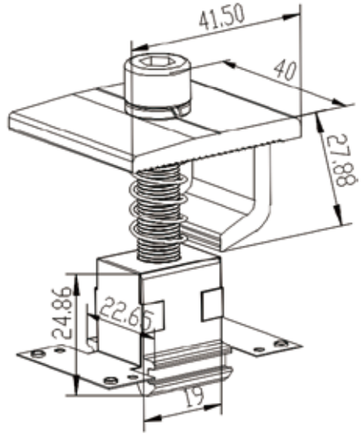

Component List（Qty./Set）			
28/35 Universal Clamp A	1	Hexagon Bolt(M8*40)	1
28/35 Universal Clamp B	1	SUS304 Washer	1
Earthing Washer	1	Spring	1

Arc Base

Product Name	Goomax Arc Base
Product Code	GM-ARC-BS-AZ-02
Application	Metal Roof, Flat Roof
Dimensions	L 40xW 67.8xH 46.2mm
Weight	0.099kg
Material	AL6005-T5, Bolts:Carbon Steel 1022A, Rubber Pad and washer:EPDM
Surface Finish	Anodized (10um)
Packaging	290pcs/carton , 500x300x210mm
Standard	AS/NZS 1170.2

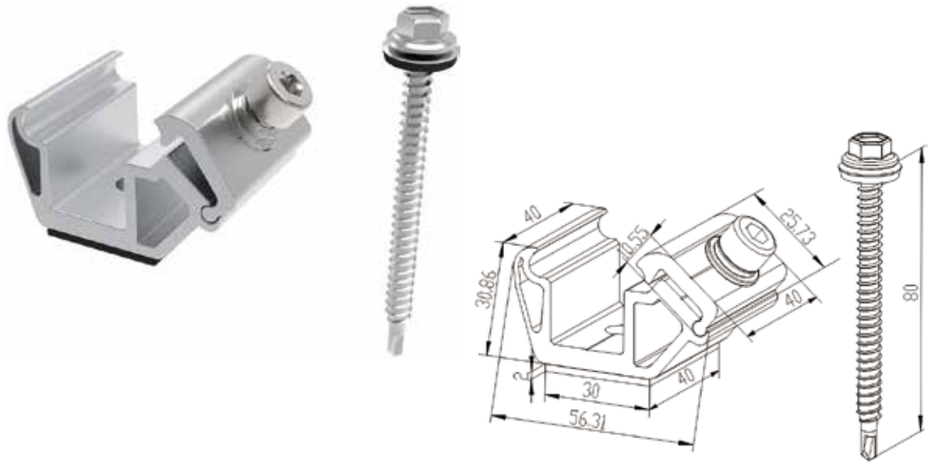


Component List（Qty./Set）			
Goomax Arc Base A	1	Hexagon Bolt(M8*20)	1
Goomax Arc Base B	1	SUS304 Washer	1
Rubber Pad	1	SUS304 Washer Set	1
Rubber Washer	1	St6.3x70 Screws(Carbon Steel 1022A)	1

T Module

Product Name	Goomax T Module
Product Code	GM-COB-BN-AZ
Application	Goomax T module for Goomax's PV mounting systems
Dimensions	L 40xW 34xH 18.8mm
Weight	0.025kg
Material	AL6005-T5, Earthing Washer:SUS304
Surface Finish	Anodized (10um)
Packaging	Package together with the front and hind legs
Standard	AS/NZS 1170.2



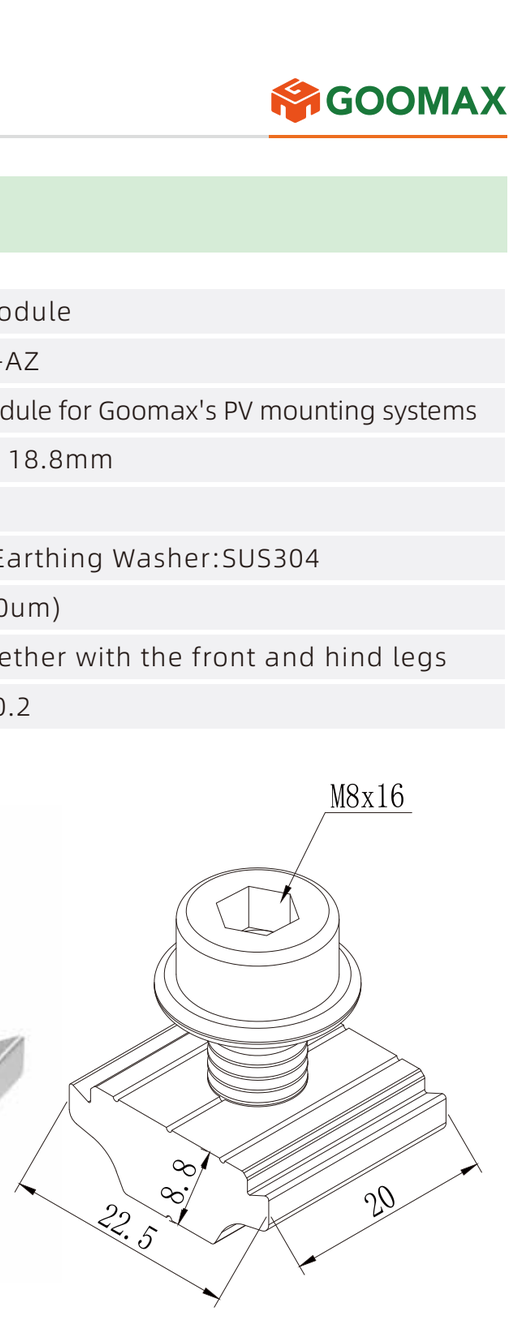


Component List（Qty./Set）			
T Nut	1	Earthing Washer	1
Hexagon Bolt(M8*16)	1		

Tilt Front Leg 10 degrees

Product Name	Commercial Tilt Front Leg 10 degrees
Product Code	GM-COBE-FL-10-AZ
Application	Mental Roof, Flat Roof
Dimensions	L 40xW 69.1xH 82.3mm
Weight	0.098kg
Material	AL6005-T5
Surface Finish	Anodized (10 micron)
Packaging	120pcs./carton , 500x300x210mm
Standard	AS/NZS 1170.2



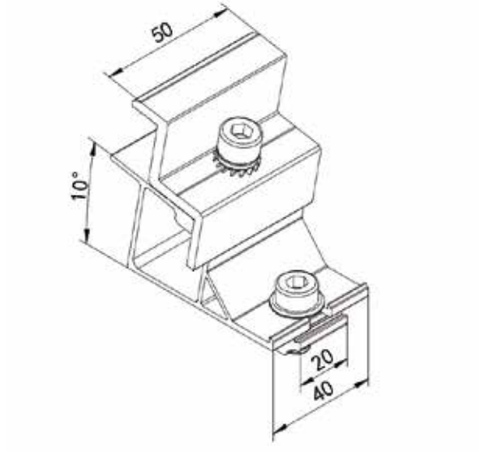


Component List（Qty./Set）			
Commercial Tilt Front Leg 10 degrees	1	Hexagon Bolt(M8*30)	1
L50 Clamp	1	SUS304 Washer	1
Earthing Pin	3	SUS304 Spring	1
T nut	1	Hexagon Bolt(M8*16)	1

Tilt Front Leg 10 degrees

Product Name	Black Commercial Tilt Front Leg 10 degrees
Product Code	GM-COBE-FL-10-AZ-B
Application	Metal Roof, Flat Roof
Dimensions	L 40xW 69.1xH 82.3mm
Weight	0.098kg
Material	AL6005-T5
Surface Finish	Black Anodized (10 micron)
Packaging	120pcs./carton , 500x300x210mm
Standard	AS/NZS 1170.2



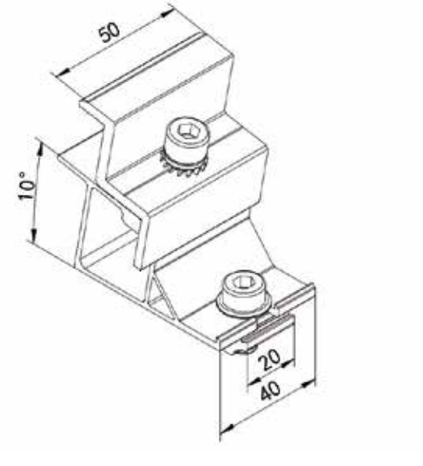


Component List（Qty./Set）			
Commercial Tilt Rear Leg 10 degrees	1	Hexagon Bolt(M8*30)	1
L50 Clamp	1	SUS304 Washer	1
Earthing Pin	3	SUS304 Spring	1
T nut	1	Hexagon Bolt(M8*16)	1

Tilt Rear Leg 10 degrees

Product Name	Commercial Tilt Rear Leg 10 degrees
Product Code	GM-COBE-RE-10-AZ
Application	Metal Roof, Flat Roof
Dimensions	L 40xW 111xH 278.6mm
Weight	0.272kg
Material	AL6005-T5
Surface Finish	Anodized (10 micron)
Packaging	25pcs./carton , 500x300x210mm
Standard	AS/NZS 1170.2



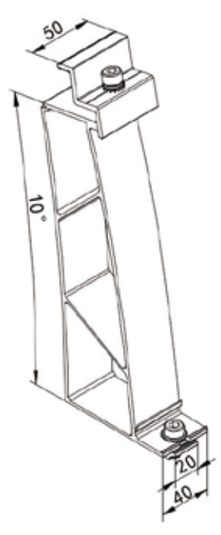


Component List（Qty./Set）			
Commercial Tilt Rear Leg 10 degrees	1	Hexagon Bolt(M8*30)	1
L50 Clamp	1	SUS304 Washer	1
Earthing Pin	3	SUS304 Spring	1
T nut	1	Hexagon Bolt(M8*16)	1

GOOMAX

Tilt Rear Leg 10 degrees

Product Name	Black Commercial Tilt Rear Leg 10 degrees
Product Code	GM-COBE-RE-10-AZ-B
Application	Metal Roof, Flat Roof
Dimensions	L 40xW 111xH 278.6mm
Weight	0.272kg
Material	AL6005-T5
Surface Finish	Black Anodized (10 micron)
Packaging	25pcs./carton , 500x300x210mm
Standard	AS/NZS 1170.2



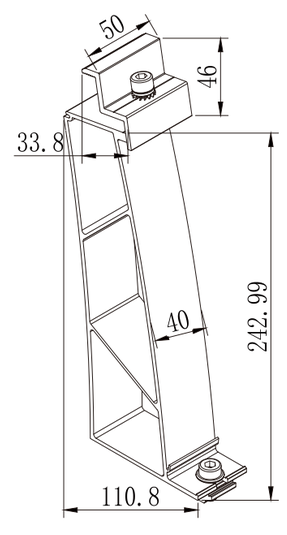


Component List（Qty./Set）			
Commercial Tilt Rear Leg 10 degrees	1	Hexagon Bolt(M8*30)	1
L50 Clamp	1	SUS304 Washer	1
Earthing Pin	3	SUS304 Spring	1
T nut	1	Hexagon Bolt(M8*16)	1

Tilt Front Leg 15 degrees

Product Name	Commercial Tilt Front Leg 15 degrees
Product Code	GM-COBE-FL-15-AZ
Application	Metal Roof, Flat Roof
Dimensions	L 40xW 77.7xH 79.9mm
Weight	0.095kg
Material	AL6005-T5
Surface Finish	Anodized (10um)
Packaging	120pcs/carton , 500x300x210mm
Standard	AS/NZS 1170.2



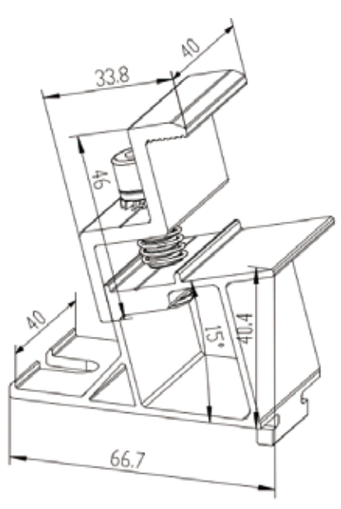


Component List（Qty./Set）			
Commercial Tilt Front Leg 15 degrees	1	Hexagon Bolt(M8*30)	1
Pressing block	1	SUS304 Washer	1
Spring	1	SUS304 Star Washer	1
Earthing Pin	1		

Tilt Rear Leg 15 degrees

Product Name	Commercial Tilt Rear Leg 15 degrees
Product Code	GM-COBE-RE-15-AZ
Application	Metal Roof, Flat Roof
Dimensions	L 40xW 111xH 278.6mm
Weight	0.365kg
Material	AL6005-T5
Surface Finish	Anodized (10um)
Packaging	15pcs/carton , 500x300x210mm
Standard	AS/NZS 1170.2



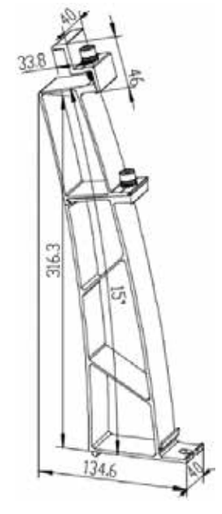


Component List（Qty./Set）			
Commercial Tilt Rear Leg 15 degrees A	1	Hexagon Bolt(M8*16)	1
Commercial Tilt Rear Leg 15 degrees B	1	Hexagon Bolt(M8*30)	1
Pressing block	1	SUS304 Washer	2
Spring	1	SUS304 Star Washer	2
Earthing Pin	1		

Rail End Cap

Product Name	All-black Rail End Cap
Product Code	GM-C69
Application	Roof railing
Dimensions	L 56xW 32xH 11.5mm
Weight	0.005KG
Material	Plastic
Packaging	500pcs./carton , 500x300x210mm
Standard	AS/NZS 1170.2



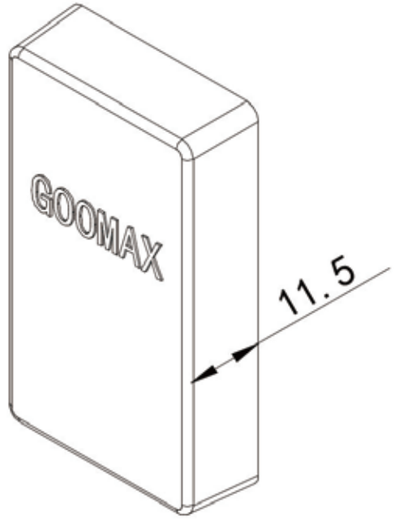

Component List（Qty./Set）	
Rail Cap	1

GOOMAX